

ChexGo Series

Dynamic Checkweigher



DYNAMIC CHECKWEIGHTER CW-60K

- Heavy load heavy duty, for bags ,boxes weight up to 60kg with accuracy within 10 grams;
- Strong structure for harsh environment, option S304 S316 structure, option stainless loadcell;
- Using 4 loadcells for platform, with variable mounting position for high accuracy under rough environment;
- Flexible Modbus communication to integrate with computer, scanner, dimension measure device and soon.

Multiple industrial application



Logistic



Automation



Grain and feeds



5-60kg

Weighing range



±10g

Accuracy



60+Pcs/min

Speed




Standard specification

Model	CW-60K
Weighing range	5~60Kg
Scale division	5g
Highest Accuracy(3 σ) *	± 5 g
Highest Weighing speed *	60pcs/min
Belt speed	10~60m/min
Belt size	1000/1200×600mm
Weighing platform Height **	400~750mm (± 50 mm)
Tested object size	Length:100~800/1000mm Width: 50~600mm Height: 50~600mm
Structure of the material	Carbon steel, SS304 stainless steel (weighing platform)
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	optional
Power	AC 220V , 50/60Hz, 800W
operating temperature	0~40°C
IP grade	IP30

* Depend on the weight, size, and material of test object. Test accuracy: 5g at 30pcs/min; 10g at 60pcs/min.

Dimensions

Unit:mm

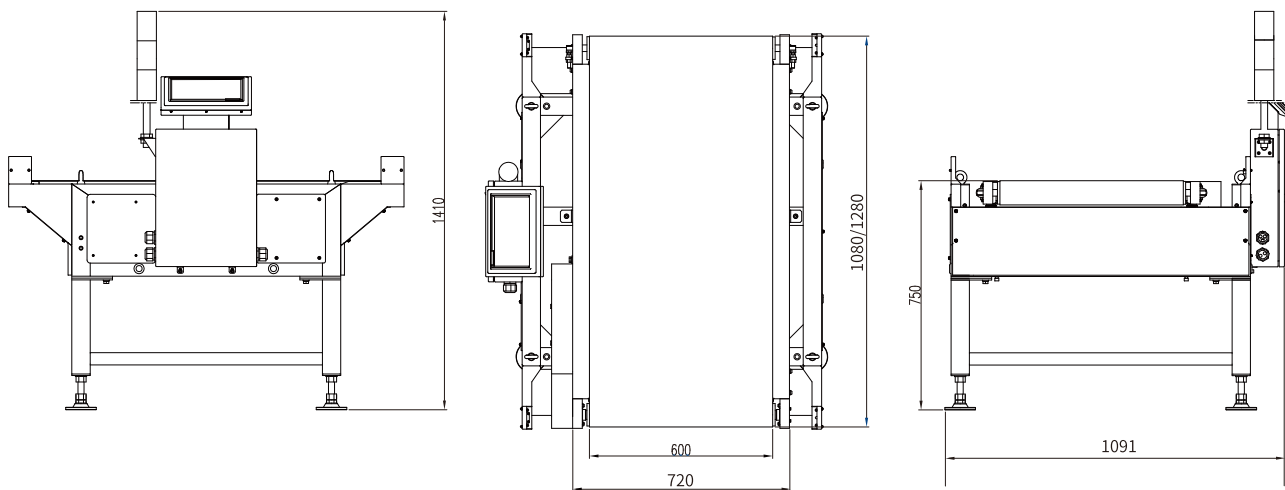



[Linkedin](#)



[Facebook](#)



[Wechat](#)



General Measure Technology Co.,Ltd.

Address: Room2208, Block A, Building 6, Shenzhen International Innovation Valley,
Nanshan District, Shenzhen, Guangdong Province, P.R.China.

Tel/Wechat: +86 185 6585 5789

E-mail: xjlv@szgmt.com

Website: www.gmweighing.com