

DYNAMIC CHECKWEIGHER CW-6K

- CW-6K check weigher is suitable for product weight range from 0.5-6kg.
- Weighing accuracy is within $\pm 2g$;
- 10-inch touch screen, can store over 1 million transaction, data export through USB;
- It is widely used for food, feeds, logistic industries, automation production line, and so on.

Multiple industrial application



Feeds



Logistic




Automation production line



0.5-6kg
Weighing range



$\pm 2g$
Accuracy



100 $+Pcs/min$
Speed




Standard specification

Model	CW-6K
Weighing range	0.5~6kg
Scale division	1g
Highest Accuracy(3 σ) *	$\pm 2g$
Highest Weighing speed *	100+pcs/min
Belt speed	10~50m/min
Belt size	500*400mm
Weighing platform Height **	750 \pm 50mm
Tested object size	Length100~420mm, Width50~400mm, Height50~400mm
Belt material	PVC
Structure of the material	Carbon steel, SS304 for weighing platform
Alarm light	3-color signal light (Red, yellow, green)
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type
Power	AC220V single phase, 50/60Hz, 850W
operating temperature	0~40°C
IP grade	IP54,IP65 Optional

*Depend on the weight, size and material of test object.

Dimensions

Unit:mm

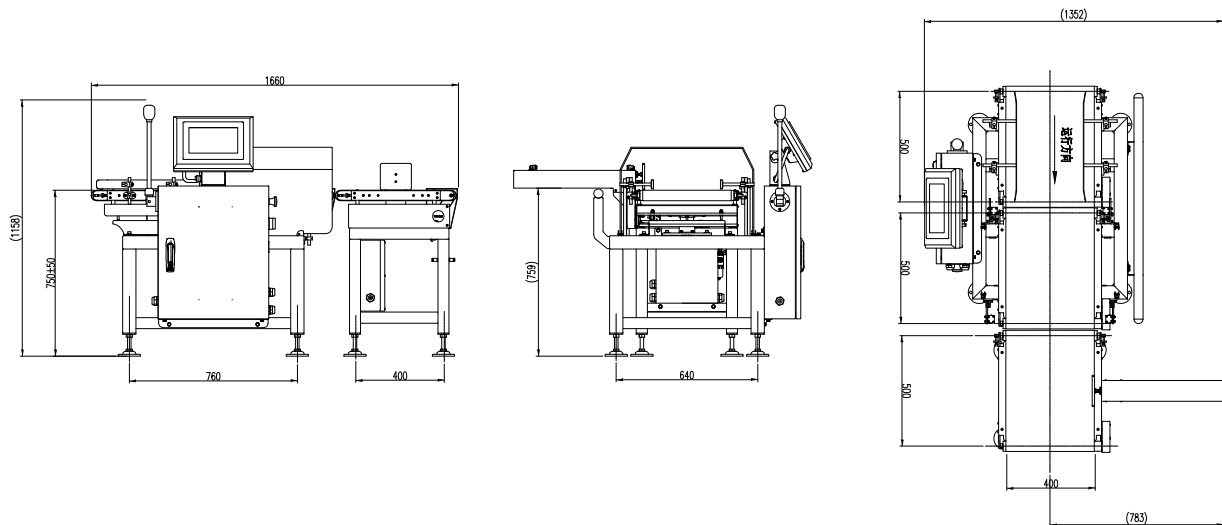

General Measure Technology Co.,Ltd.

Address: Room2208, Block A, Building 6, Shenzhen International Innovation Valley,
Nanshan District, Shenzhen, Guangdong Province, P.R.China.
Tel/Wechat: +86 185 6585 5789
E-mail: xjlv@szgmt.com
Website: www.gmweighing.com



Linkedin



Facebook



Wechat