



杰 · 曼 · 科 · 技

称重传感器选型手册

Load Cell Selection Manual



企业简介

ENTERPRISE PROFILE



30⁺
年 years
行业经验
Industry Experience



40⁺
个
国家销售
Country Sales



200⁺
研发专利设计
R&D Patent



2000⁺
应用现场
Application of the scene

杰曼科技成立于1993年，30年来专注于称重仪表、检重秤及定量称重单元等称重核心部件的研发生产及销售。

杰曼科技自主研发的产品凭借着高品质、高速度、高精度等性能，为锂电、粮食、饲料、橡塑、建材、物流等诸多行业的工业称重系统提供了高效、可靠的称重解决方案，赢得了国内外2000多家客户的认可。其多个产品通过CE/CPA/OIML等国际认证，全线产品严格按照国际标准进行研发、生产及认证。

2017年，在湖南株洲设立10000平方米生产制造基地，并成立株洲市杰曼科技有限公司，为了更好的服务客户，2022年在无锡设立分公司，产品远销全球40多个国家和地区。

在众多配套商、代理商及分销商心目中，杰曼称重产品早已是集知名度、品质和价格优势于一身的首选品牌。

Founded in 1993, General Measure has been dedicated to developing, producing, and selling industrial weighing instruments, check weighers, and granule packing fillers for over 30 years.

The products are meticulously developed, manufactured, and certified in accordance with international standards. They have passed various certifications, such as CE/CPA/OIML.

In 2017, General Measure established a state-of-the-art manufacturing base spanning across 10,000m² and set up a subsidiary in Zhuzhou, Hunan province. For better serving clients, GM set a branch in Wuxi in 2022. Currently, General Measure proudly collaborates with 15 exclusive partners worldwide while catering to clients from more than 40 countries and regions. The trust of over 2,000 domestic and international customers serves as an affirmation of General Measure's excellence.



目录CONTENTS

称重传感器Load Cell ————— 03

悬臂梁/波纹管称重传感Shear /Bending Beam Load Cell

GML-X8 F Series系列	04
GML-X8 B Series系列	05
GML-X8 Q Series系列	06
GML-X8 S Series系列	07
GML-B5 M Series系列 波纹管	09

柱式称重传感器Canister Load Cell

GML-Z4 A Series系列	11
GML-Z4 D Series系列	13

S型传感器S Type Load Cell

GML-S3 E Series系列	14
GML-S3 A Series系列	15

单点式传感器Single Point Load Cell

GML-D6 1260 Series系列	16
GML-D6 1241 Series系列	17
GML-D6 1022 Series系列	18
GML-D6 845 Series系列	19
GML-X11 K Series系列 箱式	20

称重模块及附件Weighing Module ————— 21

GML-M8系列 悬臂梁模块及附件 Weighing module with shear beam load cell	22
GML-M5系列 波纹管模块及附件 Weighing module with bending beam load cell	27
GML-M4系列 柱式模块及附件 Weighing module with canister load cell	28




称重传感器




订货型号信息Model Order Information:


Load cell type model(output signal)		Weighing range	Series	Material	Cable length	Accuracy	Anti-explosion
GML-传感器类型及数字代码 (输出特性)-量程-系列号材质-线长 精度 防爆特性							
shear beam load cell: X8	悬臂梁为X8	数字版: D Digital: D		不锈钢: S Stainless steel: S			防爆: Ex Anti-explosion: Ex
bending beam load cell: B5	波纹管为B5						
canister load cell: Z4	柱式为Z4	合金钢: C Alloy steel: C		常规: 不标注 Normal: blank			
s type load cell: S3	S型为S3						
single point load cell: D6	单点式为D6						
single point load cell: X11	箱式为X11						
pancake load cell: L7	轮辐式为L7						




平台秤: 采用单/多只传感器
Platform Scale with
single/multiple load cells




皮带秤
Belt scale




计价秤
Commercial scale




检重秤
Check weigher




定量失重秤
Loss-in-weight scale



定量灌装秤
Filling scale



定量包装机
Packing scale



吊罐秤
Crane scale




悬臂梁称重传感器

Shear Beam Load Cell

结构紧凑，安装高度低；
焊接密封，防护等级IP68；
防爆等级：Ex ia IIC T4 Ga；Ex iaD 20 T135；
模拟及数字版本可选。

Compact installation at minimum installation height;
Welded sealing, IP68;
Explosive-proof grade: Ex ia IIC T4 Ga；Ex iaD 20 T135;
Analog or digital version selection.

单位 Unit: mm

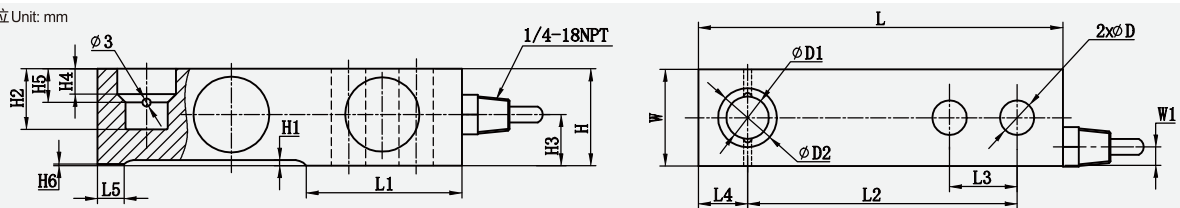

Cap(单位)	D	D1	D2	H	H1	H2	H3	H4	H5	H6	L	L1	L2	L3	L4	L5	W	W1
0.1~1t	13.0	22.2	15.9	30.2	1.8	17.3	16.0	4.8	7.9	0.38	133.4	57.7	101.6	25.4	15.4	6.4	30.7	6.1
2t	13.0	22.2	15.9	36.6	6.0	22.9	19.6	9.5	12.7	/	136.7	57.9	101.6	25.4	18.4	/	36.8	6.1
3t	15	22.2	15.9	36.6	4.0	22.9	19.6	9.5	12.7	/	136.7	57.9	104.6	25.4	18.4	/	39	6.1
5t,7.5t	19.3	34.9	22.2	42.9	4.5	29.3	22.6	10.8	17.8	/	171.5	73.8	133.4	38.1	21.4	/	42.9	6.1

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数		
Accuracy class 精度等级		C3		
Maximum capacity (Emax) 额定载荷	t	0.1 / 0.2 / 0.5 / 1 / 2 / 3 / 5 / 7.5		
Minimum LC verification interval(Vmin)最小检定分度值	% of Emax	0.0200		
Sensitivity(Cn)/Zero balance 灵敏度/零点平衡	mV/V	2.0±0.002/00.02		
Temperature effect on zero balance (TK0) 温度对零点影响	% of Cn/10K	±0.0170		
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.0170		
Hysteresis error(dhy)滞后误差	%of Cn	±0.0180		
Non-linearity(dlin)非线性误差	%of Cn	±0.0167		
Creep(dcr) over 30 min.蠕变及蠕变恢复	% of Cn	±0.0167		
Input (RLc) & Output resistance (Ro) 输入&输出电阻	Ω	400±20 & 352±3		
Nominal range of excitation voltage (Bu)额定电压	V	5~15		
Insulation resistance(Ris) at 50Vdc 绝缘电阻	MΩ	>5000		
Service temperature range(Btu) 工作温度	℃	-30...+70		
Safe load limit(EL) & Break load(Ed)破坏载荷&安全承载	% of Emax	150 & 300		
Protection class according to EN60529 (IEC 529) 保护等级		IP68		
Material : Measuring element 材料:测量元件		Stainless or Avolly steel 合钢和不锈钢可选		
Cable fitting 电缆配件		Stainless steel or nickel-plated brass		
Cable-sheath 电缆护套		PVC		
Maximum capacity(Emax) 额定载荷	t	0.1 / 0.2 / 0.5 / 1	2 / 3	5 / 7.5
Deflection at Emax(Sno),approx.最大荷下的变形量	mm	<0.5	<0.5	<0.6
Weight(G),approx重量	kg	1.1	1.3	3.2
Cable 电缆: Diameter直径Φ6mm Length 长度	m	4.5	4.5	7

GML-X8 B Series系列




悬臂梁称重传感器

Shear Beam Load Cell

结构紧凑，安装高度低；
有过载保护与支撑杆，采取摆支撑有自复位功能；
模拟及数字版本可选。

Compact installation at minimum installation height;
With overload stop and stay rod,
Self-restoring due to pendulum bearing;
Analog or digital version selection.

单位 Unit: mm

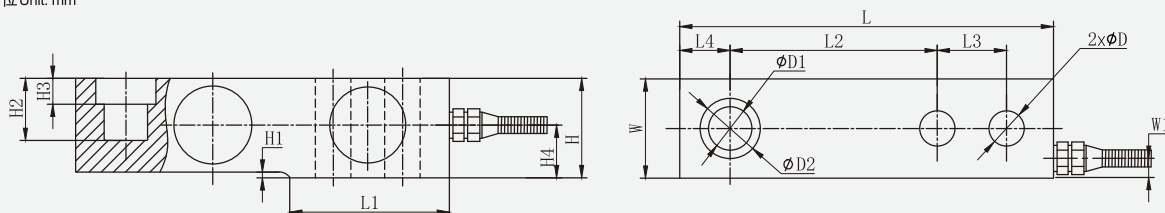

Cap(单位)	D	D1	D2	H	H1	H2	H3	H4	L	L1	L2	L3	L4	W	W1
0.5,1,2,3	12.7	15.9	26	36.6	2.1	22.9	4.2	19.1	136.6	57.9	76.2	25.4	18.4	36.8	7
5,7.5	19.3	22.2	34.9	42.9	2.4	29.3	11	23	171.5	73.8	95.2	38.1	21.4	42.9	6.5

地上衡、配料秤、料斗秤、
平面台秤
Floor scale, blending scale,
hopper scale, platform scale

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C 3
Maximum capacity (E _{max}) 额定载荷	t	0.5,1,2,3,5,7.5
Minimum LC verification interval (V _{min}) 最小检定分度值	% of E _{max}	0.0200
Sensitivity (C _n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.002
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	± 0.0170
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	± 0.0170
Hysteresis error (d _{hy}) 滞后误差	% of C _n	± 0.0180
Non-linearity (d _{lin}) 非线性误差	% of C _n	± 0.0167
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	± 0.0167
Input (R _{ic}) & Output resistance (R _o) 输入&输出电阻	Ω	400 ± 10 & 352 ± 3
Nominal range of excitation voltage (B _u) 额定电压	V	5~15
Insulation resistance (R _{is}) at 50Vdc 绝缘电阻	MΩ	> 5000
Service temperature range (B _{tu}) 工作温度	℃	-30 ~ 70
Safe load limit (E _L) & Breaking load (E _d) 安全承载&破坏载荷	% of E _{max}	150 & 200
Protection class according to EN 60 529 (IEC 529) 保护等级		IP68
Material 材料		合金钢和不锈钢可选 Option: Alloy steel, Stainless steel.

Maximum capacity (E _{max}) 额定载荷	t	0.5 / 1	2 / 3 / 5	7.5
Deflection at E _{max} (s _{nom}) ,approx最大载荷下的变形量	mm	<0.5	<0.5	<0.6
Weight(G),approx 重量	kg	1.1	1.3	3.2
Cable 电缆: Diameter 直径: Ø6mm Length 长度	m	3.5	5	7

GML-X8 Q Series系列





悬臂梁称重传感器

Shear Beam Load Cell


结构紧凑，安装高度低；
有过载保护与支撑杆，采取摆支撑有自复位功能；
模拟及数字版本可选。

Compact installation at minimum installation height;
With overload stop and stay rod,
Self-restoring due to pendulum bearing;
Analog or digital version selection.

单位 Unit: mm

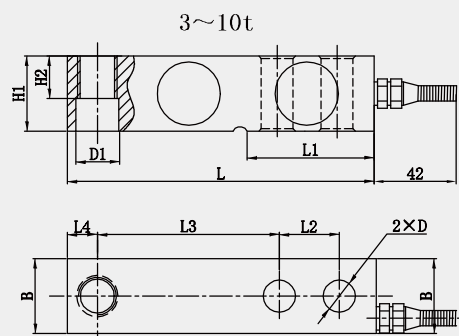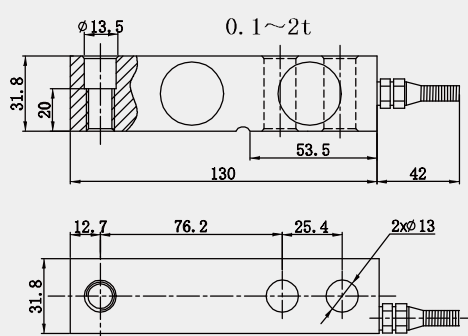

Cap(单位)	L	L1	L2	L3	L4	B	H1	H2	D	D1	D2
3~5	171.5	72.5	38.1	95.3	19	38.1	38.1	26	20	20	M18×1.5
7.5~10	225.5	102	50.8	124	25.3	50.8	50.8	25.4	27	27	M24×2



地上衡、配料控制系统、平台台秤
Floor scale, blending control system, platform scale

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数			
Accuracy class 精度等级		C3			
Maximum capacity (Emax) 额定载荷	t	0.1 / 0.3 / 0.5 / 1 / 2 / 3 / 5 / 7.5 / 10			
Minimum LC verification interval (Vmin) 最小检定分度值	% of Emax	0.0100			
Sensitivity (Cn) / Zero balance 灵敏度/零点平衡	mV/V	0.1~0.3t : 2.0±0.002 / 0±0.02 1~10t : 3.0±0.003 / 0±0.03			
Temperature effect on zero balance (TK0) 温度对零点影响	% of Cn/10K	±0.0170			
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.0170			
Hysteresis error (dny) 滞后误差	% of Cn	±0.0180			
Non-linearity(dlin) 非线性误差	% of Cn	±0.0167			
Creep(dcr) over 30 min. 蠕变及蠕变恢复	% of Cn	±0.0167			
Input (RLc)&Output resistance (R0) 输入&输出电阻	Ω	400±10 & 352±3			
Nominal range of excitation voltage (Bu) 额定电压	V	5~15			
Insulation resistance(Ris)at 50Vdc 绝缘电阻	MΩ	≥5000			
Service temperature range (Btu) 工作温度	℃	-40...+70			
Safe load limit (EL)&Breaking load(Ed) 安全承载&破坏载荷	% of Emax	120 & 200			
Protection class according to EN 60 529 (IEC 529) 保护等级		IP68 / IP67			
Material 材料		合金钢和不锈钢可选 Option: Alloy steel, Stainless steel.			
Maximum capacity (Emax) 额定载荷	t	0.1~2.5	3	5	7.5 10
Deflection at Emax (snom) ,approx 最大载荷下的变形量	mm	<0.65	<0.75	<0.85	
Weight(G),approx 重量	kg	1.2	1.7	3.8	
Cable 电缆: Diameter 直径: 6mm Length长度	m	3	4.2	5	

GML-X8 S Series系列




悬臂梁称重传感器

Shear Beam Load Cell

结构紧凑，安装高度低；
有过载保护与支撑杆，采取摆支撑有自复位功能；
模拟及数字版本可选。

Compact installation at minimum installation height;
With overload stop and stay rod,
Self-restoring due to pendulum bearing;
Analog or digital version selection.

单位 Unit: mm

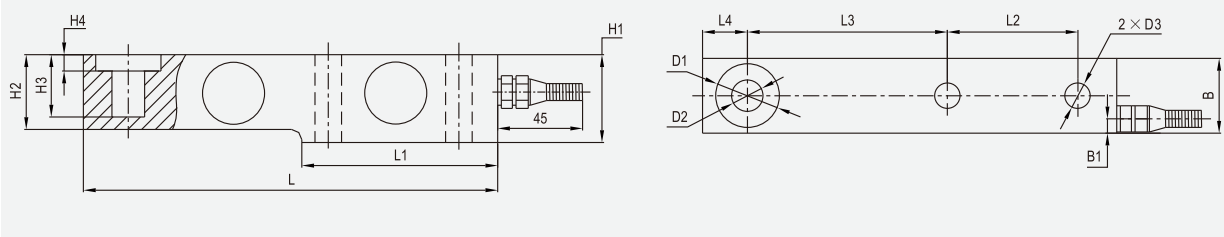

Cap(单位)	L	L1	L2	L3	L4	H1	H2/B	B1	H3	H4	D1	D2	D3
0.5,1,2,3	203	95	64	98	22	43	36.6	7	30.5	8	ø32	ø16	ø13
5,7.5,8	235	110	66	124	22	52	48	7	30	12	ø38	ø22	ø21
10,15	279	133	82	140	32	67	60	8.5	20	8.5	ø48	ø32	ø28
20,25	318	153	89	159	38	82.5	70	9.5	24	9.5	ø54	ø38	ø34

地上衡、配料秤、料斗秤、
平台秤
Floor scale, blending scale,
hopper scale, platform scale


Specifications 技术说明 Exc+ (Red,红); Exc- (Black,黑); Sig+ (Green,绿); Sig- (White,白); Sen+ (Blue,蓝); Sen- (Yellow,黄)

Item 项目	Unit 单位	Parameter 参数							
Accuracy class 精度等级		C3							
Maximum capacity (E _{max}) 额定载荷	t	0.5,1,2,3,5,7.5,8,10,15,20,25							
Minimum LC verification interval (V _{min}) 最小检定分度值	% of E _{max}	0.0100							
Sensitivity (C _n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.002 / 0 ± 0.02							
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	±0.0170							
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	±0.0170							
Hysteresis error (d _{hy}) 滞后误差	% of C _n	±0.0180							
Non-linearity(d _{lin}) 非线性误差	% of C _n	±0.0167							
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	±0.0167							
Input (R _{LC}) & Output resistance (R _o) 输入&输出电阻	Ω	400 ± 10 & 352 ± 3							
Nominal range of excitation voltage (B _u) 额定电压	V	5~12							
Insulation resistance (R _{is}) at 50Vdc 绝缘电阻	MΩ	> 5000							
Service temperature range (B _{tu}) 工作温度	°C	-30~70							
Safe load limit (E _L) & Breaking load(E _d) 安全承载&破坏载荷	% of E _{max}	150 & 300(0.5t~5t);120&200(8t~25t)							
Protection class according to EN 60 529 (IEC 529) 保护等级		500kg:IP67;1t~25t:IP68							
Material 材料		合金钢和不锈钢可选 Option: Alloy steel, Stainless steel.							
Maximum capacity (E _{max}) 额定载荷	t	0.5,1,2	3	5	7.5/8	10	15	20	25
Deflection at E _{max} (s _{nom}) ,approx最大载荷下的变形量	mm	<1		<1.2		<1.5		<1.5	
Weight(G),approx 重量	kg	2.2		4.2		8.0		11.5	
Cable 电缆: Diameter 直径: ø6mm Length长度	m	2.6	3.5	5.2	7	12	12		

GML-X8 S Series Assembly Drawing系列总装图

总装图 A


Assembly Drawing A

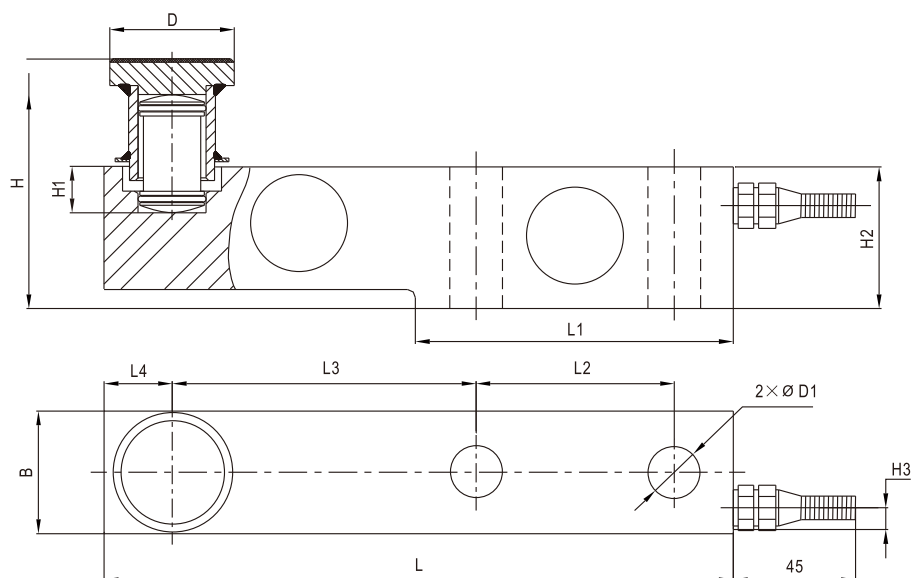

Cap(单位)	L	L1	L2	L3	L4	B	H	H1	H2	H3	D	D1
0.5, 1, 2, 3	203	95	64	98	22	36.6	58	30.5	43	7	Ø 35	Ø 13
5, 7, 5, 8	235	110	66	124	22	48	81	30	52	7	Ø 42	Ø 21
10, 15	279	133	82	140	32	60	128	20	67	8.5	Ø 57	Ø 28
20, 25	318	153	89	159	38	70	144	24	82.5	9.5	Ø 70	Ø 34

总装图 B

Assembly Drawing B

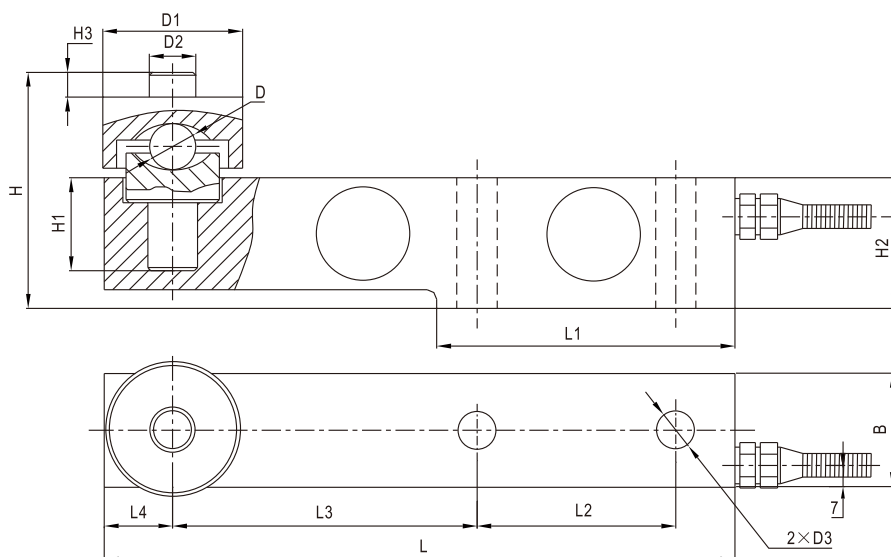

Cap(单位)	L	L1	L2	L3	L4	B	H	H1	H2	H3	D	D1	D2	D3
0.5, 1, 2, 3	203	95	64	98	22	36.6	79	30.5	43	9	Ø 16	Ø 45	Ø 15	Ø 13
5, 7, 5, 8	235	110	66	124	22	48	104	30	52	10	Ø 25	Ø 52	Ø 21	Ø 21

GML-B5 M Series系列




波纹管称重传感器

Bending Beam Load Cell


结构紧凑，安装高度低，防护等级IP68；
防爆等级：Ex ia IIC T4 Ga ; Ex iaD 20 T135；
模拟及数字版本可选。

Compact installation at minimum installation height, IP68;
Explosive-proof grade: Ex ia IIC T4 Ga ; Ex iaD 20 T135;
Analog or digital version selection.

单位 Unit: mm

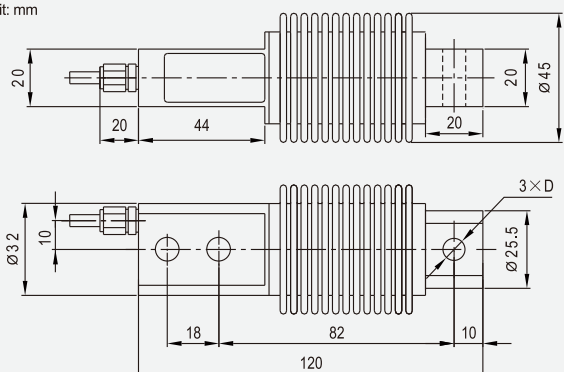

Cap(单位)	D
10,20,50,75,100,200,250	Ø 8.2
300,500	Ø 10.2



料斗秤、皮带秤、配料系统
hopper scale, belt scale, blending system


Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C3
Maximum capacity (E _{max})额定载荷	kg	10,20,50,75,100,200,250,300,500
Minimum LC verification interval (V _{min})最小检定分度值	% of E _{max}	0.0100
Sensitivity (C _n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.002
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	± 0.0170
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	± 0.0170
Hysteresis error (d _{hy}) 滞后误差	% of C _n	± 0.0180
Non-linearity(d _{lin}) 非线性误差	% of C _n	± 0.0167
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	± 0.0167
Input (R _{LC}) & Output resistance (R _o) 输入&输出电阻	Ω	400±10 & 352±3
Nominal range of excitation voltage (B _u) 额定电压	V	5~12
Insulation resistance (R _{is}) at50Vdc 绝缘电阻	MΩ	≥5000
Service temperature range (B _{tu}) 工作温度	℃	-30~70
Safe load limit (E _L) & Breaking load(E _d) 安全承载&破坏载荷	% of E _{max}	120 & 200
Protection class according to EN 60 529 (IEC 529) 保护等级		IP68
Material 材料		合金钢和不锈钢可选 Option: Alloy steel,Stainless steel.

Maximum capacity (E _{max}) 额定载荷	kg	10	20	50	75	100	200	250	300	500
Deflection at E _{max} (s _{nom}) ,approx最大载荷下的变形量	mm	0.31							0.39	
Weight(G),approx 重量	kg	0.5								
Cable 电缆: Diameter 直径: Ø5mm Length长度	m	3								

1000kg

圆锥头，圆锥面承载方式



(10kg~500kg) 钢球压头承载方式:

球压头加载方式：

steel ball indenter loading method:

The drawing illustrates the steel ball indenter loading method. The top view is a side elevation showing the indenter assembly. The indenter is a steel ball with a diameter of $\varnothing 16$ mm, mounted on a holder. The holder has a total height of 89 mm, with a 5 mm gap between the ball and the holder. The indenter is positioned 22 mm above the specimen surface. The specimen is a rectangular block with a width of 44 mm and a height of 30 mm. The indenter is loaded by a force M applied to a lever arm of length 20 mm. The specimen is supported by a base with a width of 60 mm and a height of 17 mm. The base is secured with two $M12 \times 8$ bolts and an $M8$ bolt. The bottom view is a front elevation showing the indenter assembly from the front. The indenter is positioned 25.5 mm above the specimen surface. The specimen has a width of 120 mm and a height of 50 mm. The indenter is loaded by a force M applied to a lever arm of length 10 mm. The specimen is supported by a base with a width of 18 mm and a height of 10 mm. The base is secured with two $M12 \times 8$ bolts and an $M8$ bolt.

(10kg~500kg) 拉式附件结构图

Technical drawing of a pull-type attachment, showing side and end views with dimensions in millimeters.

Side View Dimensions:

- Total length: 142
- Distance from front flange to start of coil: 49
- Coil length: 75
- Coil diameter: 15
- Distance from end of coil to rear flange: 15

End View Dimensions:

- Outer diameter: 24
- Inner diameter: $2 \times D$
- Flange thickness: 83

— 10 —


GML-Z4 A Series系列



柱式传感器 Canister Load Cells

激光焊接IP68;
自复位功能;
经过角差预调整适合并联使用(按EN 45501);
模拟及数字版本可选。

Laser welded,IP68;
Self-restoring function;
Optimized for paralld connection by corner pre-adjustment,
Meets EMC/ESD requirements according to EN 45 501;
Analog or digital version selection.



汽车衡、轨道衡、轴量秤、地上衡


Truck scale,railway scale,axle wheel scale,floor scale

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)


Item 项目	Unit 单位	Parameter 参数					
Accuracy class 精度等级		C3					
Maximum capacity (Emax) 额定载荷	t	10,15,20,30,40,50					
Minimum LC verification interval (Vmin) 最小检定分度值	% of Emax	0.0100					
Sensitivity (Cn) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.002					
Temperature effect on zero balance (TKo) 温度对零点影响	% of Cn/10K	±0.0170					
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.0170					
Hysteresis error (dhy) 滞后误差	% of Cn	±0.0180					
Non-linearity(dlin) 非线性误差	% of Cn	±0.0167					
Creep(dcr) over 30 min. 蠕变及蠕变恢复	% of Cn	±0.0167					
Input (RLc) & Output resistance (Ro) 输入&输出电阻	Ω	700 ± 20 & 703 ± 3.5					
Nominal range of excitation voltage (Bu) 额定电压	V	5~12					
Insulation resistance (Ris) at50Vdc 绝缘电阻	MΩ	>5000					
Service temperature range (Btu) 工作温度	℃	-30 ~ 70					
Safe load limit (EL) & Breaking load(Ed) 安全承载&破坏载荷	% of Emax	150 & 250					
Protection class according to EN 60 529 (IEC 529) 保护等级		IP68					
Material 材料		合金钢和不锈钢可选 Option: Alloy steel,Stainless steel.					
Maximum capacity (Emax) 额定载荷	t	10	15	20	30	40	50
Min. scale verification (emin) according to En45501 [...#=#max. Number of load cells] 秤的最小检定分度值	kg	5 [6#]	5 [6#]	5 [6#] 10 [8#]	10 [8#]	10 [6#] 20 [8#]	10 [4#] 20 [10#]
Recommended maximum weighing capacity of scale 推荐秤的额定载荷	t	20	30	50 80	100	120 150	100 200
Deflection at Emax (snom) ,approx最大载荷下的变形量	mm	0.55	0.55	0.65	0.75	0.85	0.85
Weight(G),approx 重量	kg	2.8	3.2	3.2	3.6	3.6	3.8
Cable 电缆: Diameter 直径: Ø5mm Length长度	m	10	12	12	14	16	16

Mounting variation: 安装方式:
for (10~50)t


单位 Unit: mm

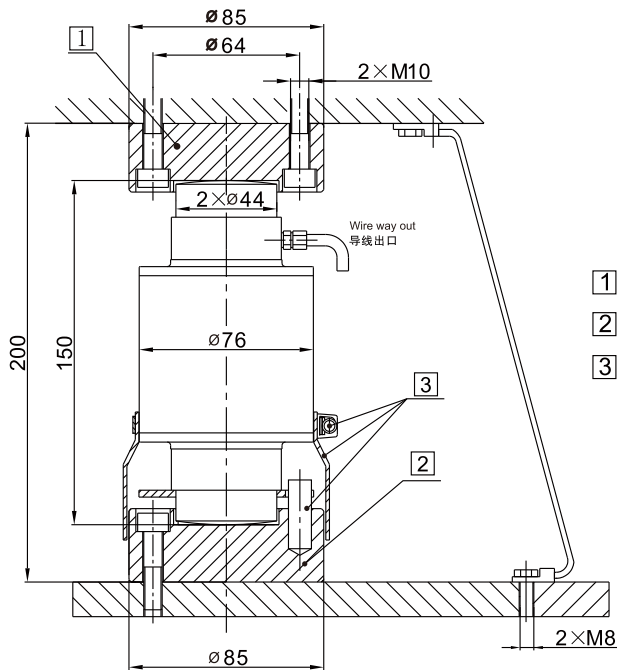

- ① GML-Z4 A/ZOU B1
- ② GML-Z4 A/ZOU2 B2
- ③ Dowel pin $\Phi 10 \times 30$ (rotation stop), flexible tube and tube clip enclosed in the packing of the load cell
防旋转插销, 伸缩管与管夹在传感器包装中

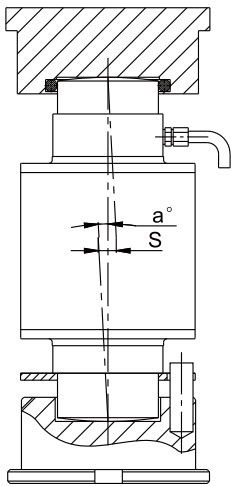

Wiring code (4-wire circuit)
电缆芯线色标 (四线制)

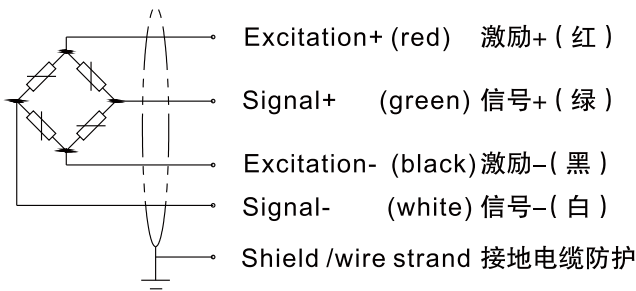

Cap(单位)	t	10	15	20	25	30	40	50
R ball 球头半径	mm	130	130	160	160	160	180	180
amax 最大允许倾斜角度	" ° " 度	4.8	4.8	4.8	4.8	4.8	4.8	4.5
Smax 最大允许侧向偏移	mm	12	12	12	12	12	12	10.5
FR(% of applied load) 回复力 (施力大小的百分比)	at Smax	6.3	6.3	9.8	9.8	9.8	12	12
	at S=1mm	0.48	0.48	0.75	0.75	0.75	0.93	0.93

GML-Z4 D Series系列






柱式传感器 Canister Load Cells

激光焊接IP68;
自复位功能;
经过角差预调整适合并联使用(按EN 45501);
模拟及数字版本可选。

Laser welded, IP68;
Self-restoring function;
Optimized for parallel connection by corner pre-adjustment,
Meets EMC/ESD requirements according to EN 45 501;
Analog or digital version selection.

单位 Unit: mm 5~22.5t

25~100t

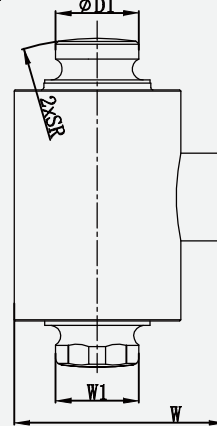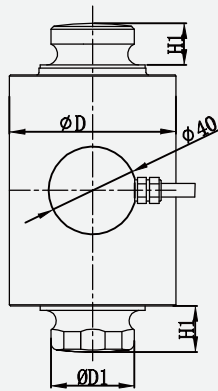

Cap(单位)	5	7.5	10	15	22.5
R(6)	140				160

Cap(单位)	W	W1	H	H1	D	D1	R
10,20,30,40	96	35.5	150	19	76	37.8	160
50	96	35.5	150	19	76	37.8	305
100	122	50.6	150	19	102	53.8	305

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数					
Accuracy class 精度等级		C 3					
Maximum capacity (E _{max}) 额定载荷	t	5 / 7.5 / 10 / 15 / 22.5 / 25 / 30 / 40 / 50 / 100					
Minimum LC verification interval(V _{min})最小检定分度值	% of E _{max}	0.0100					
Sensitivity(C _n)/Zero balance 灵敏度/零点平衡	mV/V	2.0±0.002 / 0±0.02					
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	±0.0170					
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	±0.0170					
Hysteresis error(d _{hy})滞后误差	% of C _n	±0.0180					
Non-linearity(d _{lin})非线性误差	% of C _n	±0.0167					
Creep(d _{cr}) over 30 min.蠕变及蠕变恢复	% of C _n	±0.0167					
Input (R _{Lc}) & Output resistance (R _o) 输入&输出电阻	Ω	1150±20 & 1005±5					
Nominal range of excitation voltage (B _u) 额定电压	V	5~15					
Insulation resistance(R _{is}) at 50Vdc 绝缘电阻	MΩ	>5000					
Service temperature range(B _{tu}) 工作温度	℃	-40..+70					
Safe load limit(EL) & Break load(Ed)破坏载荷及安全承载	% of E _{max}	150 & 250					
Protection class according to EN60529 (IEC 529) 保护等级		IP68					
Material: Measuring body+housing 材料: 测量元件+壳体		Stainless or alloy steel+Stainless steel 合金钢和不锈钢可选+不锈钢					
Maximum capacity (E _{max}) 额定载荷	t	5	10	15	22.5	25~50	100
Deflection at E _{max} (s _{nom}), approx 最大载荷下的变形量	mm	<0.55	<0.6	<0.65	<0.7	<0.75	<0.85
Weight(G), approx 重量	kg	1.5			3.8	6.3	
Cable 电缆: Diameter 直径: Ø5mm Length 长度	m	12			16	16	

GML-S3 E Series系列




S型传感器

S Type Load Cells

结构紧凑，综合精度高；
防护等级IP68。

Compact installation, high accuracy;
IP68.

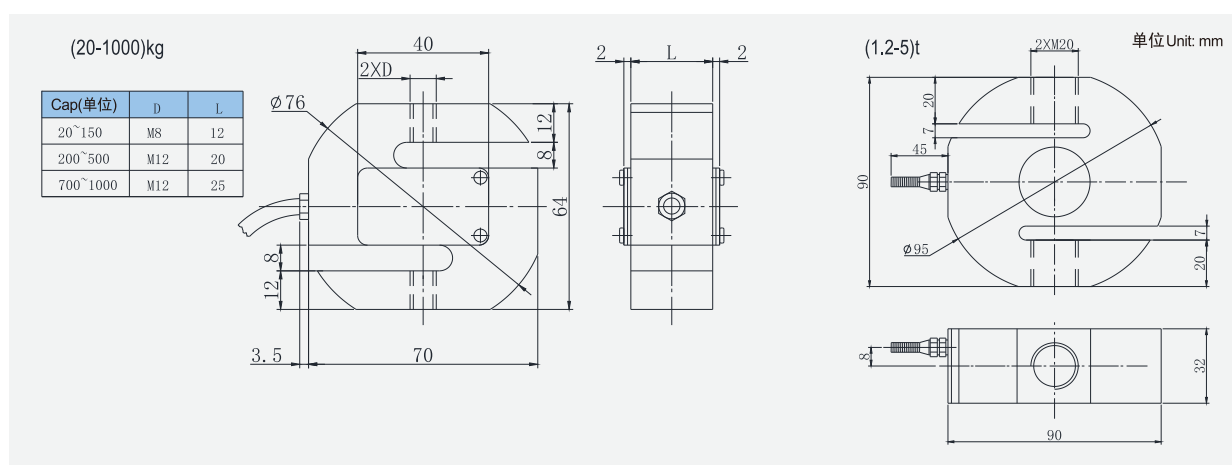

Specifications 技术说明

Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C3
Maximum capacity (Emax) 额定载荷	t	0.1,0.2,0.25,0.3,0.5,1,2,5
Minimum LC verification interval (Vmin) 最小检定分度值	% of Emax	0.0100
Sensitivity (Cn) 灵敏度	mV/V	2.0±0.002
Zero balance 零点平衡	mV/V	0±0.02
Temperature effect on zero balance (TKo) 温度对零点影响	% of Cn/10K	±0.0170
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.0170
Hysteresis error (dhy) 滞后误差	% of Cn	±0.0180
Non-linearity(dlin) 非线性误差	% of Cn	±0.0167
Creep(dcr) over 30 min. 蠕变及蠕变恢复	% of Cn	±0.0167
Input (RLc) & Output resistance (Ro) 输入&输出电阻	Ω	400±10 & 352±3
Nominal range of excitation voltage (Bu) 额定电压	V	5~12
Insulation resistance (Ris) at 50Vdc 绝缘电阻	MΩ	≥5000
Service temperature range (Btu) 工作温度	℃	-30~70
Safe load limit (EL) & Breaking load(Ed) 安全承载&破坏载荷	% of Emax	120 & 200
Protection class according to EN 60 529 (IEC 529) 保护等级		0.1t~1t:IP67;2t~5t:IP68
Material 材料		合金钢和不锈钢可选 Option: Alloy steel,Stainless steel.

Maximum capacity (Emax) 额定载荷	t	0.1,0.2,0.25,0.3,0.5	1	2	3	5
Deflection at Emax (snom) ,approx最大载荷下的变形量	mm	0.15	0.25	0.45		
Weight(G),approx 重量	kg	0.6	0.8	1.5		
Cable 电缆: Diameter 直径: Ø5mm Length长度	m	5				

GML-S3 A Series系列




S型传感器 S Type Load Cells


结构紧凑，综合精度高；
防护等级IP68。

Compact installation, high accuracy;
IP68.

单位 Unit: mm

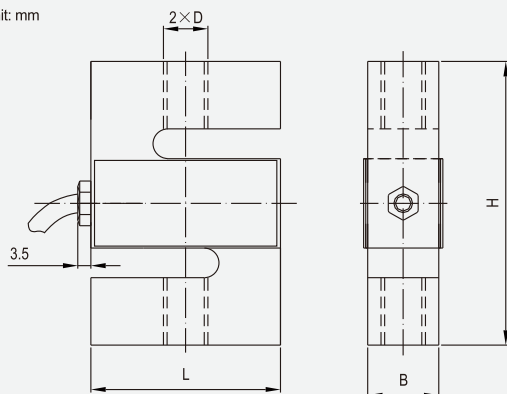

Cap(单位)	H	L	B	D
0.1,0.2,0.25,0.3,0.5	76.2	51	19.1	M12
1	76.2	51	25.4	M12
2,3,5	100.4	76.2	31.8	M20×1.5



吊钩秤、皮带秤、配料系统
crane scale, belt scale, blending system

Specifications 技术说明 Exc+(Red,红); Exc-(Black,黑); Sig+(Green,绿); Sig-(White,白); Sen+(Blue,蓝); Sen-(Yellow,黄)

Item 项目	Unit 单位	Parameter 参数					
Accuracy class 精度等级		C3					
Maximum capacity (Emax) 额定载荷	t	0.1,0.2,0.25,0.3,0.5,1,2,5					
Minimum LC verification interval (Vmin)最小检定分度值	% of Emax	0.01					
Sensitivity (Cn) 灵敏度	mV/V	2.0±0.002					
Zero balance 零点平衡	mV/V	0±0.02					
Temperature effect on zero balance (TK0) 温度对零点影响	% of Cn/10K	±0.0170					
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.0170					
Hysteresis error (dhy) 滞后误差	% of Cn	±0.0180					
Non-linearity(dlin) 非线性误差	% of Cn	±0.0167					
Creep(dcr) over 30 min. 蠕变及蠕变恢复	% of Cn	±0.0167					
Input (RLc) &Output resistance (Ro)输入&输出电阻	Ω	400±10 & 352±3					
Nominal range of excitation voltage (Bu) 额定电压	V	5~12					
Insulation resistance (Ris) at50Vdc 绝缘电阻	MΩ	≥5000					
Service temperature range (Btu) 工作温度	℃	-30~70					
Safe load limit (EL) & Breaking load(Ed) 安全承载&破坏载荷	% of Emax	120 & 200					
Protection class according to EN 60 529 (IEC 529)保护等级		0.1t~1t:IP67;2t~5t:IP68					
Material 材料		合金钢和不锈钢可选 Option: Alloy steel,Stainless steel.					

Maximum capacity (Emax) 额定载荷	t	0.1,0.2,0.25,0.3,0.5	1	2	3	5
Deflection at Emax (snom) ,approx最大载荷下的变形量	mm	0.15	0.25	0.45		
Weight(G),approx 重量	kg	0.6	0.8	2.5		
Cable 电缆: Diameter 直径: ø5mm Length长度	m	5				

GML-D6 1260 Series系列




单点式传感器

Single Point Load Cells

铝合金材质;
防护等级: IP65;
适合单个或者双个传感器结构的秤体的平台秤。

Alloy steel;
IP65;
Suitable for platform scale with single or dual load cells.

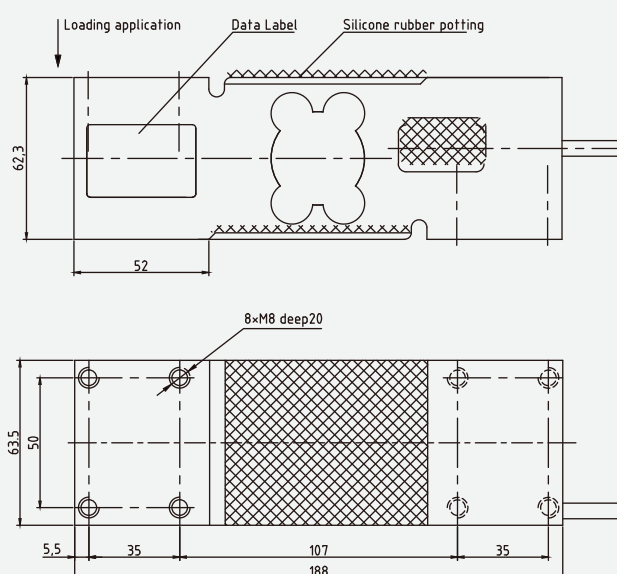

单位 Unit: mm

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C 3
Maximum capacity (E _{max}) 额定载荷	kg	150 / 250 / 500 / 750
Minimum LC verification interval(V _{min})最小检定分度值	% of E _{max}	0.0023
Sensitivity(C _n)/Zero balance 灵敏度/零点平衡	mV/V	2.0±0.2
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	±0.017
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	±0.010
Hysteresis error(d _{hy})滞后误差	%of C _n	<±0.017
Non-linearity(d _{lin})非线性误差	%of C _n	<±0.017
Creep(d _{cr}) over 30 min.蠕变及蠕变恢复	% of C _n	<±0.017
Input (RLC) &Output resistance (R _o) 输入&输出电阻	Ω	404±10 & 350±3
Nominal range of excitation voltage (B _u)额定电压	V	5~15
Insulation resistance(R _{is}) at 50Vdc 绝缘电阻	MΩ	>5000
Service temperature range(B _{tu}) 工作温度	℃	-30...+70
Safe load limit(EL) & Break load(Ed)破坏载荷&安全承载	% of E _{max}	150 & 300
Protection class according to EN60529 (IEC 529) 保护等级		IP65
Weight(G),approx重量	kg	1.8
Cable 电缆: Diameter直径Φ6mm Length 长度	m	2.5

GML-D6 1241 Series系列




单点式传感器

Single Point Load Cells

铝合金材质;
防护等级: IP65;
适合单个或者双个传感器结构的秤体的平台秤。

Alloy steel;
IP65;
Suitable for platform scale with single or dual load cells.

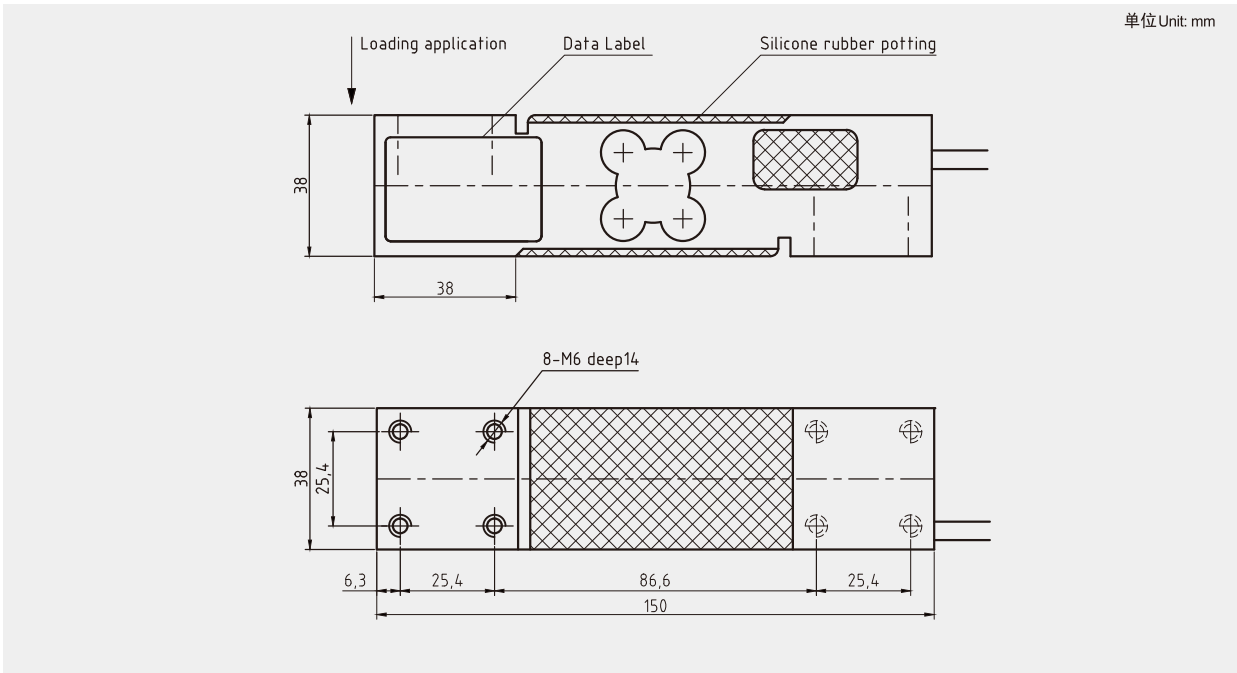

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C3
Maximum capacity (Emax) 额定载荷	kg	50 / 100 / 200 / 250
Minimum LC verification interval(Vmin)最小检定分度值	% of Emax	0.0023
Sensitivity(Cn)/Zero balance 灵敏度/零点平衡	mV/V	2.0±0.2
Temperature effect on zero balance (TK0) 温度对零点影响	% of Cn/10K	±0.017
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.010
Hysteresis error(dhy)滞后误差	%of Cn	<±0.017
Non-linearity(dlin)非线性误差	%of Cn	<±0.017
Creep(dcr) over 30 min.蠕变及蠕变恢复	% of Cn	<±0.017
Input (RLc) &Output resistance (Ro) 输入&输出电阻	Ω	404±10 & 350±3
Nominal range of excitation voltage (Bu)额定电压	V	5~15
Insulation resistance(Ris) at 50Vdc 绝缘电阻	MΩ	>5000
Service temperature range(Btu) 工作温度	℃	-30...+70
Safe load limit(EL) & Break load(Ed)破坏载荷&安全承载	% of Emax	150 & 300
Protection class according to EN60529 (IEC 529) 保护等级		IP65
Weight(G),approx重量	kg	0.6
Cable 电缆: Diameter直径Φ6mm Length 长度	m	2.0

GML-D6 1022 Series系列




单点式传感器

Single Point Load Cells

铝合金材质;
防护等级: IP65;
适合单个或者双个传感器结构的秤体的平台秤。

Alloy steel;
IP65;
Suitable for platform scale with single or dual load cells.

单位 Unit: mm

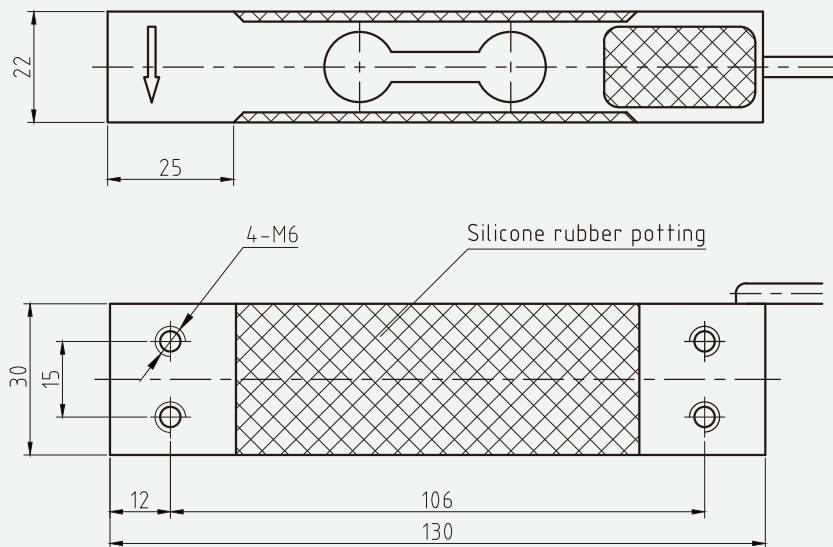

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负 (Black,黑);Sig+信号正 (Green,绿);Sig-信号负 (White,白)

Item 项目	Unit 单位	Parameter 参数
Accuracy class 精度等级		C3
Maximum capacity (Emax) 额定载荷	kg	5 / 10 / 20 / 40 / 50
Minimum LC verification interval(Vmin)最小检定分度值	% of Emax	0.0023
Sensitivity(Cn)/Zero balance 灵敏度/零点平衡	mV/V	2.0±0.2
Temperature effect on zero balance (TKo) 温度对零点影响	% of Cn/10K	±0.017
Temperature effect on sensitivity (TKc) 温度对灵敏度影响	% of Cn/10K	±0.010
Hysteresis error(dhy)滞后误差	%of Cn	<±0.017
Non-linearity(dlin)非线性误差	%of Cn	<±0.017
Creep(dcr) over 30 min.蠕变及蠕变恢复	% of Cn	<±0.017
Input (RLc) & Output resistance (Ro) 输入&输出电阻	Ω	404±10 & 350±3
Nominal range of excitation voltage (Bu) 额定电压	V	5~15
Insulation resistance(Ris) at 50Vdc 绝缘电阻	MΩ	>5000
Service temperature range(Btu) 工作温度	℃	-30...+70
Safe load limit(EL) & Break load(Ed)破坏载荷&安全承载	% of Emax	150 & 300
Protection class according to EN60529 (IEC 529) 保护等级		IP65
Weight(G), approx 重量	kg	0.2
Cable 电缆: Diameter直径Φ6mm Length 长度	m	0.35[可选: 1.0]

GML-D6 845 Series系列




单点式传感器

Single Point Load Cells

优质不锈钢，综合精度高；
四角偏差已补偿、安装简便快捷；
激光焊接，IP等级IP69K；
适用于罐装秤、食品设备过程称重等模拟及数字版本可选。
模拟及数字版本可选。

High quality stainless steel, high accuracy;
Four corner deviation, easy installation;
Laser welding, IP69K;
Suitable for silo scale, food equipment online weighing;
Analog or digital version selection.

单位 Unit: mm

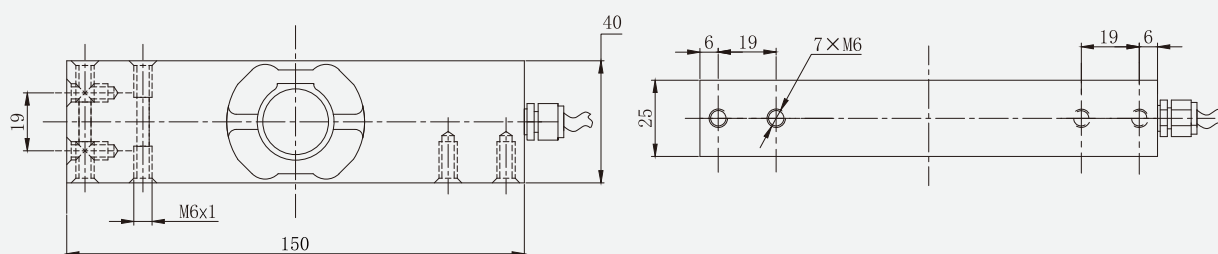

Specifications 技术说明 Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

Item 项目	Unit 单位	Parameter 参数			
Accuracy class 精度等级		C3			
Maximum capacity (E _{max}) 额定载荷	t	10,20,50,100			
Sensitivity (C _n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.2 / 0 ± 0.02			
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	± 0.0175			
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	± 0.0175			
Hysteresis error (d _{hy}) 滞后误差	% of C _n	± 0.02			
Non-linearity(d _{lin}) 非线性误差	% of C _n	± 0.0270			
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	± 0.0250			
Eccentric error 四角误差	%	± 0.0233			
Input (R _{ic})&Output resistance (R _o) 输入&输出电阻	Ω	400 ± 30 & 352 ± 3			
Nominal range of excitation voltage (B _u) 额定电压	V	5~15			
Insulation resistance(R _{is})at 50Vdc 绝缘电阻	MΩ	> 5000			
Service temperature range (B _{tu}) 工作温度	°C	-20...+50			
Safe load limit (E _L)&Breaking load(E _d) 安全承载&破坏载荷	% of E _{max}	150 & 200			
Protection class according to EN 60 529 (IEC 529) 保护等级		IP67			
Material 材料		不锈钢 Stainless steel.			
Maximum capacity (E _{max}) 额定载荷	kg	10	20	50	100
Min. load cell verification inter(v _{min}) 最小检定分度值	g	2	5	10	20
Maximum platform size 最大秤台尺寸	mm	500 × 400			
Deflection at E _{max} (s _{nom}) ,approx 最大载荷下的变形量	mm	< 0.5			
Weight(G),approx 重量	kg	1.5			
Cable 电缆: Diameter 直径: Ø6mm Length长度	m	3			

GML-X11 K Series系列




箱式传感器

Single Point Load Cells

合金钢材质，表面镀镍精度高；
抗偏载能力强；
防护等级IP67。

Alloy steel, surface nickel-plated, high accuracy;
High capability for anti-biased load;
IP67.

单位Unit: mm

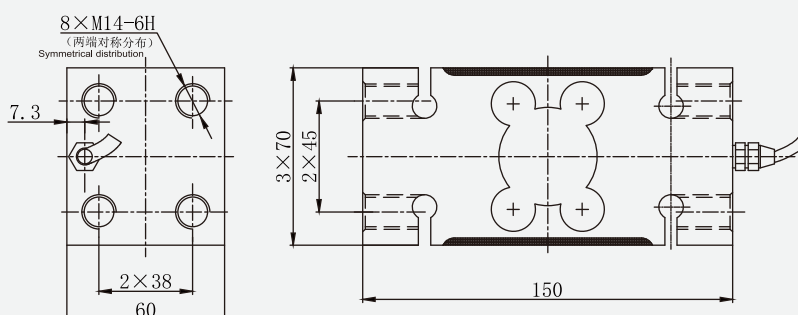

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

Item 项目	Unit 单位	Parameter 参数						
Accuracy class 精度等级		C3						
Maximum capacity (E _{max}) 额定载荷	kg	50,100,200,300,500,1000						
Sensitivity (C _n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.02						
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	± 0.0140						
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	± 0.0140						
Hysteresis error (d _{hy}) 滞后误差	% of C _n	± 0.0150						
Non-linearity(d _{lin}) 非线性误差	% of C _n	± 0.0167						
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	± 0.0167						
Eccentric error 四角误差	%	± 0.0233						
Input (R _{Lc}) &Output resistance (R _o) 输入&输出电阻	Ω	400±15 & 352±3						
Nominal range of excitation voltage (B _u) 额定电压	V	5~15						
Insulation resistance (R _{is}) at50Vdc 绝缘电阻	M Ω	≥ 5000						
Service temperature range (B _{tu}) 工作温度	℃	-20~50						
Safe load limit (E _L) & Breaking load(E _d) 安全承载&破坏载荷	% of E _{max}	120 & 200						
Protection class according to EN 60 529 (IEC 529) 保护等级		IP65						
Material 材料		合金钢材质 Alloy steel.						

Maximum capacity (E _{max}) 额定载荷	kg	50	100	200	300	500	750
Min. load cell verification inter(v _{min}) 最小检定分度值	g	20	20	50	50	100	100
Maximum platform size 最大秤台尺寸	mm	800×800					
Deflection at E _{max} (s _{nom}), approx最大载荷下的变形量	mm	< 0.6					
Weight(G),approx 重量	kg	4.3			4.5		
Cable电缆: Diameter直径: ϕ5mm Length 长度	m	3m					
Mounting:Cylindrical head screw装配:内六角圆柱头螺钉		M14-10.9					
Tightening torque 螺丝紧固力矩	N. m	35N.m					


B




称重模块及附件 Weighing module

订货型号信息Model Order Information:


Load cell digital code	Module type	Accessory type	Material	Weighing range
GML-M匹配的传感器数字代码	模块类型	附件类型	材质-量程段	
shear beam: 8 悬臂梁为8	模块类型: 0, 1, 2, 3... Module type: 0, 1, 2, 3... 0为非模块部分附件 0 is non-module accessory	附件号: 0, 1, 2, 3... Accessory no.: 0, 1, 2, 3... 0为模块整体 0 is entire module	不锈钢: S Stainless steel: S	
bending beam: 5 波纹管为5			合金钢: C Alloy steel: C	
canister: 4 柱式为4				
s type: 3 S型为3				
pancake: 7 轮辐式为7				




静态小量程: 料斗秤 料仓秤
Hopper scale (small)




静态中量程: 料斗秤 料仓秤
Hopper scale (medium)




静态大量程: 料斗秤 料仓秤
Hopper scale (large)




静动态小量程: 搅拌斗秤
Batching scale




静动态中量程: 反应釜秤
Silo scale



静动态大量程: 筒仓秤
Silo scale



板坯秤 钢卷秤 废钢秤
Platform scale



卧罐秤
Tank scale

GML-M810





悬臂梁模块

Weighing module with shear beam load cells

适用于GML-X8 F/B系列传感器;
结构紧凑, 安装简便;
防倾覆保护, 防过载保护;
适用于动静载场合;
不锈钢及合金钢材质可选。

GML-X8 F/B series are apply to this module;
Compact installation, easy installation;
Overturn and overload preventing protection;
Suitable for static and online weighing;
Stainless steel and alloy steel selection.

单位 Unit: mm

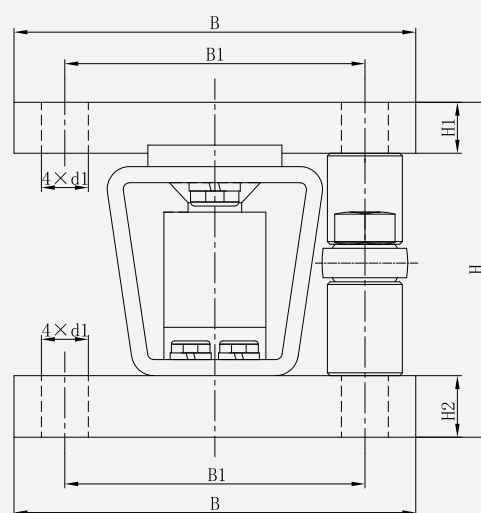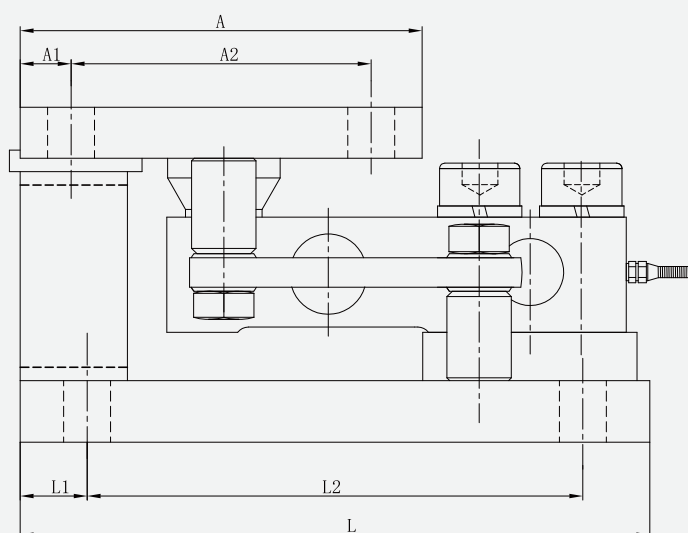

Cap(单位)	A	A1	A2	L	L1	L2	B	B1	H	H1	H2	d1
0.5,1,2	114	12.5	89	177.5	12.5	152.5	114	89	105	17	17	Ø11.2
3	114	12.5	89	177.5	12.5	152.5	114	89	108	19	19	Ø11.2
4.4	150	18	112	235	25	185	150	112	125	19	22	Ø17.5
7.5	150	18	112	235	25	185	150	112	135	22	29	Ø17.5
10	200	25	150	350	25	300	200	150	180	32	44	Ø22




悬臂梁模块

Weighing module with shear beam load cells

适用于GML-X8 S系列传感器;
结构紧凑, 安装简便;
适用于动载场合;
不锈钢及合金钢材质可选。

GML-X8 S series are apply to this module;
Compact installation, easy installation;
Suitable for online weighing;
Stainless steel and alloy steel selection.


单位 Unit: mm

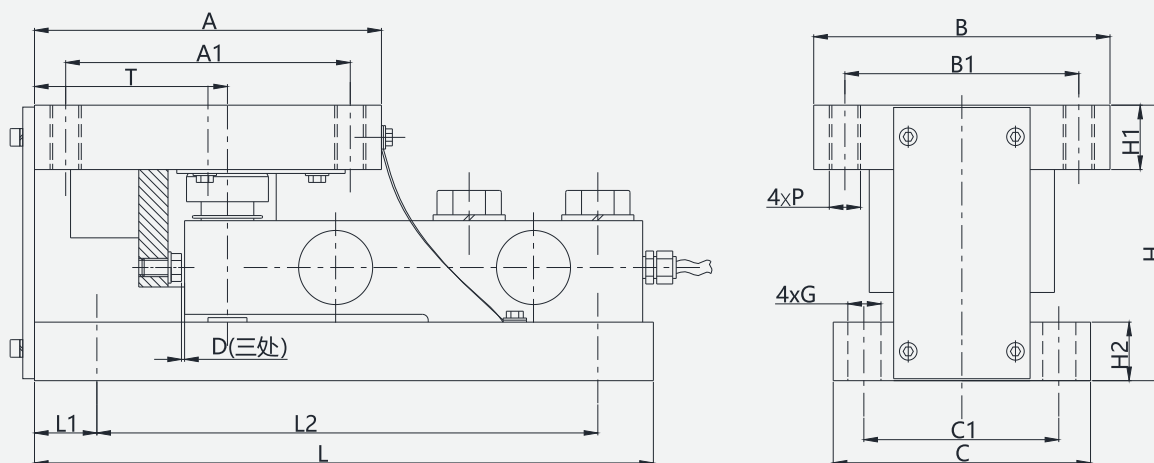


Cap(单位)	A	A1	B	B1	T	L	L1	L2	C	C1	H	H1	H2	P	G	D
0.5,1,2	150	124	128	102	96	286	32	226	112	80	107	19	19	M10	ø13	1.6
3	150	124	128	102	96	286	32	226	112	80	107	24	23	M10	ø13	1.6
5,8	178	146	152	120	99	318	32	257	152	102	146	38	30	M16	ø17	1.6
10,15	184	152	154	122	105	360	32	295	154	106	216	45	45	M20	ø21	3

Mounting examples for weighing modules 安装方式


Cutting install 切向方式



Rectangle Install 矩形方式

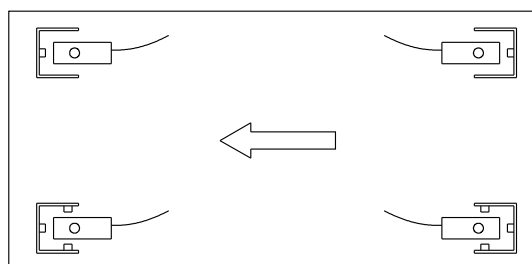

GML-M830

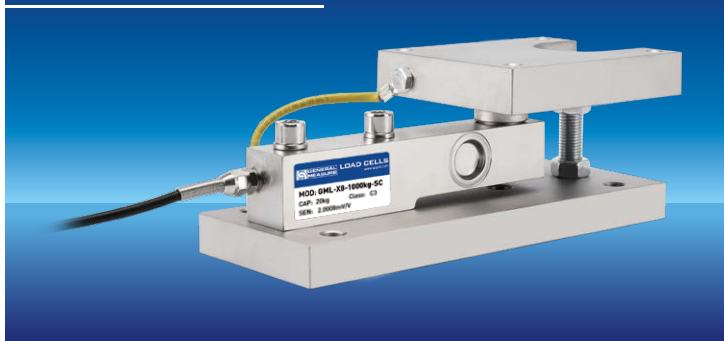


悬臂梁模块

Weighing module with shear beam load cells

适用于GML-X8 S系列传感器;
结构紧凑, 安装简便;
适用于静载场合;
不锈钢及合金钢材质可选。

GML-X8 S series are apply to this module;
Compact installation, easy installation;
Suitable for static weighing;
Stainless steel and alloy steel selection.

单位Unit: mm

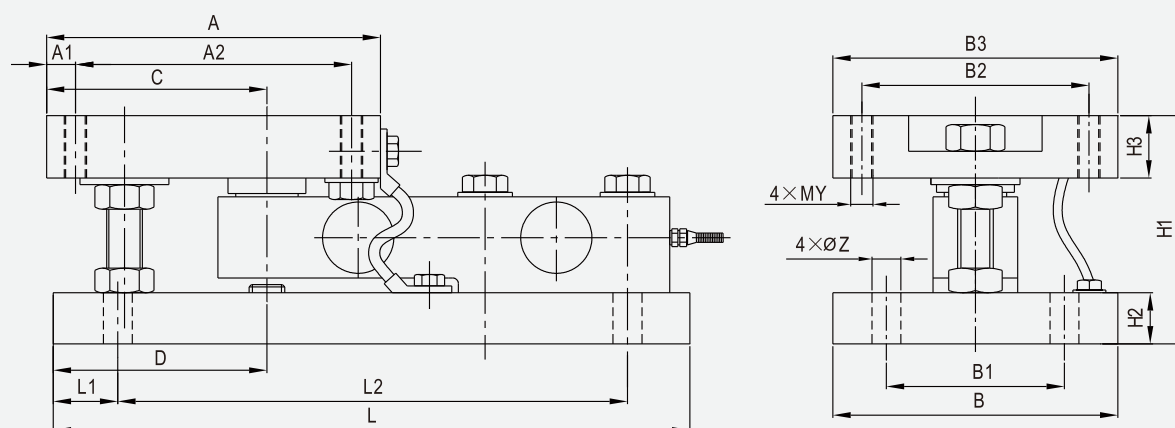




Cap(单位)	A	A1	A2	C	D	L	L1	L2	B	B1	B2	B3	H1	H2	H3	Y	Z
0. 5,1,2	150	16	124	99	96	286	32	226	112	80	102	128	107	19	24	10	13
3	150	16	124	99	96	286	32	226	112	80	102	128	107	23	28	10	13
5,8	178	16	146	102	99	318	32	257	152	102	120	152	130	30	38	16	17
10,15	184	16	152	108	105	360	32	295	154	106	122	154	168	45	45	20	21

Mounting examples for weighing modules 安装方式

Radial install 径向方式


Cutting install 切向方式

Rectangle install 矩形方式



-  Fixed Module 固定式
-  Semi-float Module 半浮动式
-  Float Module 全浮动式

GML-M840

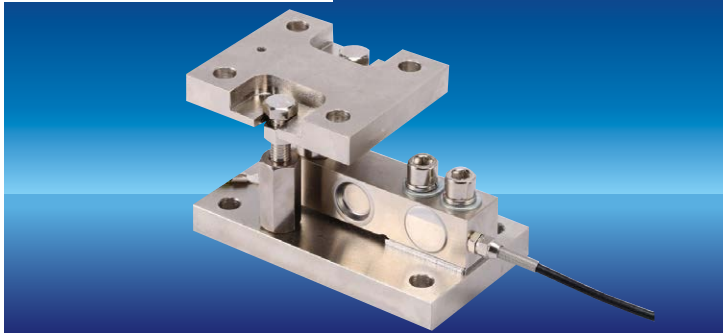


悬臂梁模块

Weighing module with shear beam load cells


适用于GML-X8 Q系列传感器;
结构紧凑, 安装简便;
不锈钢及合金钢材质可选。

GML-X8 Q series are apply to this module;
Compact installation, easy installation;
Stainless steel and alloy steel selection.



单位 Unit: mm

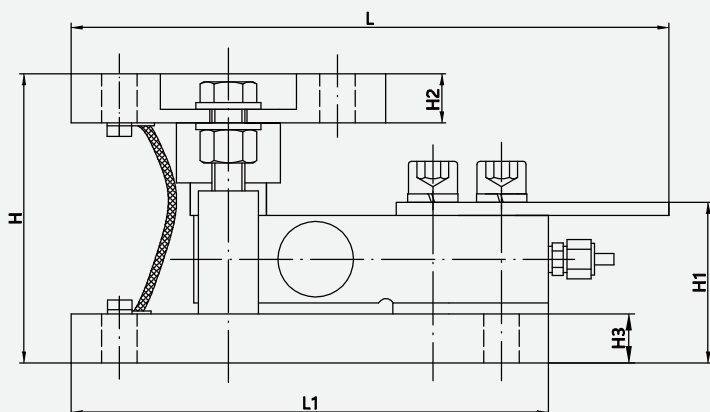


Radial install
径向方式



Cutting install
切向方式

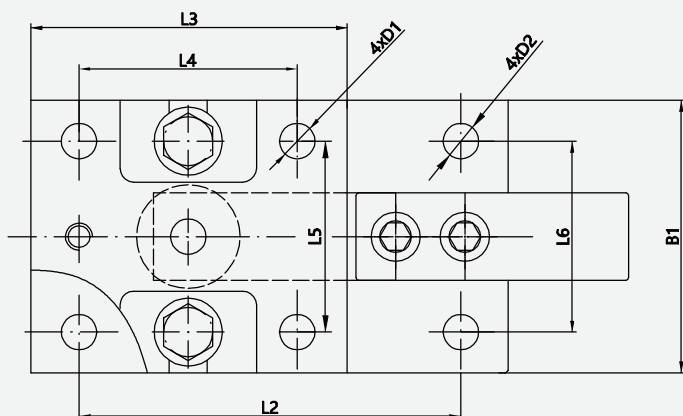

Rectangle install
矩形方式



Cap(单位)	H	H1	H2	H3	B1	D1	D2	L	L1	L2	L3	L4	L5	L6
0.1~2t	106	58	18	18	100	Φ13	Φ13	210	175	140	116	80	70	70
3,5	135	70	23	23	160	Φ17	Φ17	270	235	200	150	100	90	90
7.5,10	186.3	93.3	38	38	180	Φ26	Φ26	345.2	310	250	210.4	150.4	110	110

GML-M850




悬臂梁模块

Weighing module with shear beam load cells

适用于GML-X8 Q系列传感器;
结构紧凑, 安装简便;
不锈钢及合金钢材质可选。

GML-X8 Q series are apply to this module;
Compact installation, easy installation;
Stainless steel and alloy steel selection.

单位 Unit: mm

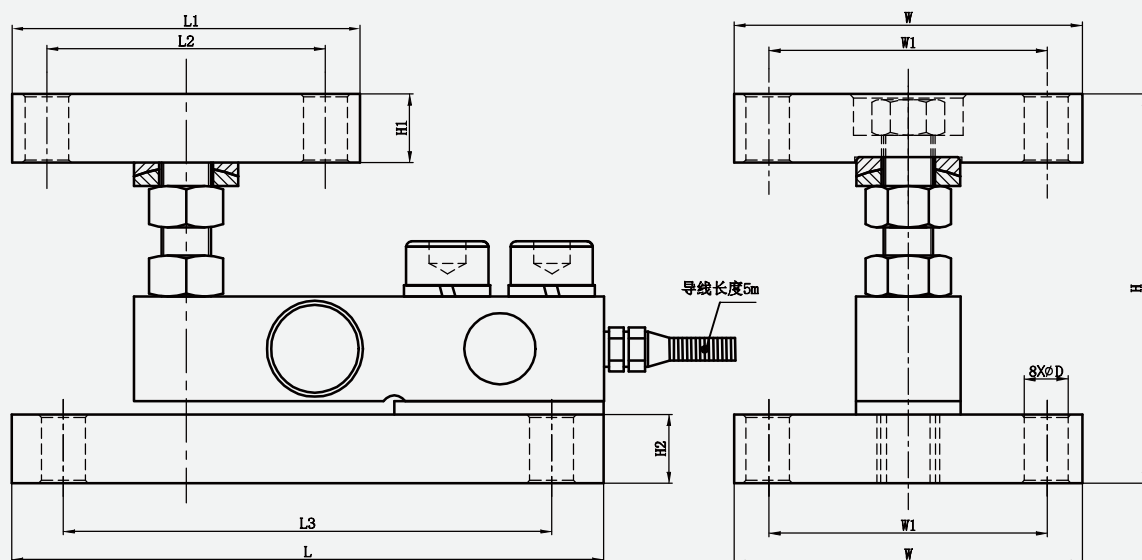

Cap(单位)	L	L1	L2	L3	H	H1	H2	W	W1	D
0.1~2t	180.9	127	101.6	102	110±5	18	18	127	101.6	16
3,5	215.9	127	101.6	120	140±5	26	26	127	101.6	16
7.5,10	286	170	127	239	195±10	34	34	170	127	18

GML-M510




波纹管模块

Weighing module with bending beam load cells

适用于GML-B5 M系列传感器;
结构紧凑, 安装简便;
不锈钢及合金钢材质可选。

GML-B5 M series are apply to this module;
Compact installation, easy installation;
Stainless steel and alloy steel selection.

单位 Unit: mm

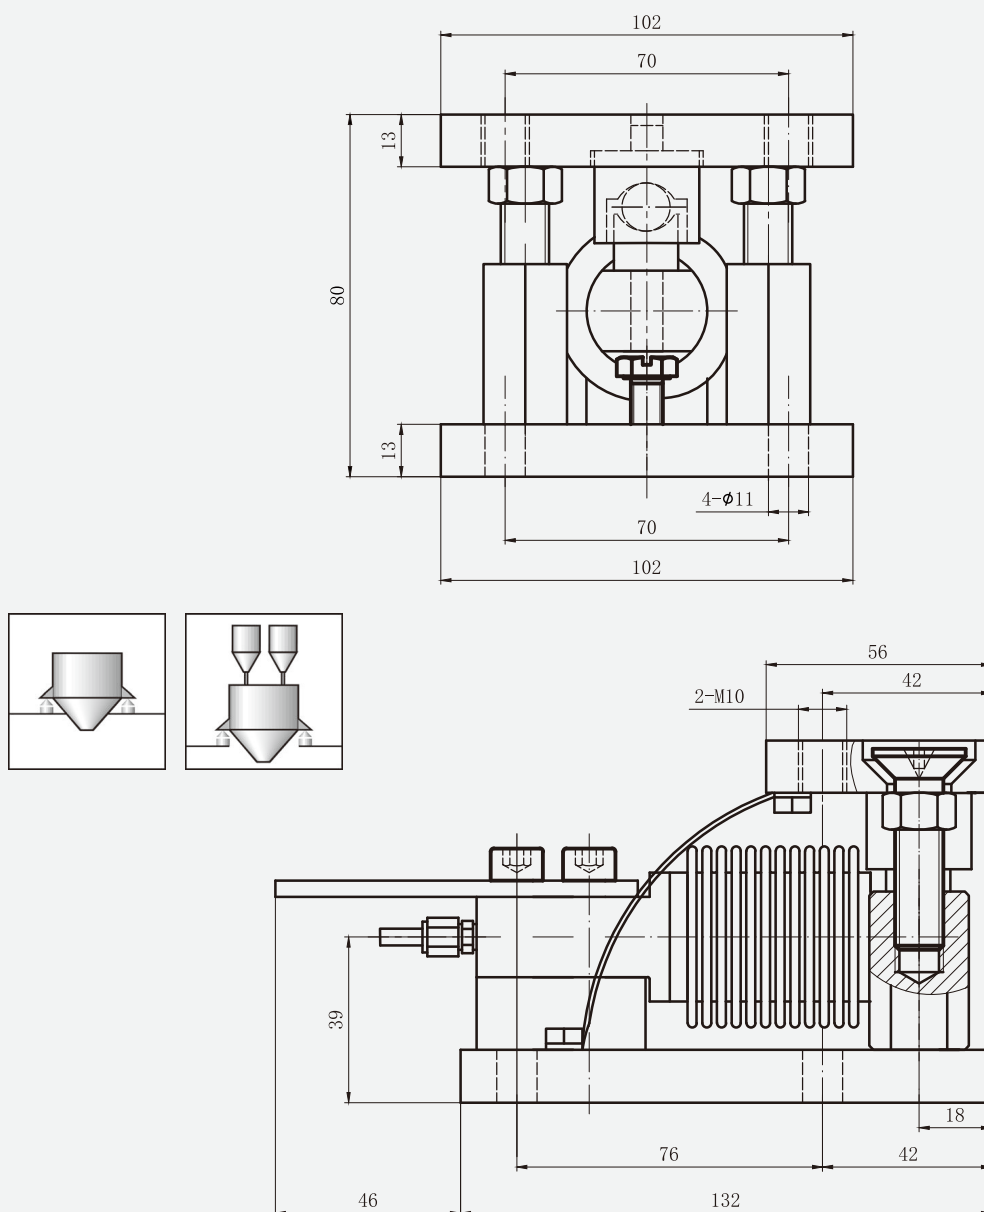

GML-M420



柱式模块

Weighing module with canister load cells

适用于GML-Z4 D系列传感器;

结构紧凑, 安装简便;



不锈钢及合金钢材质可选。

GML-Z4 D series are apply to this module;

Compact installation, easy installation;

Stainless steel and alloy steel selection.

单位 Unit: mm

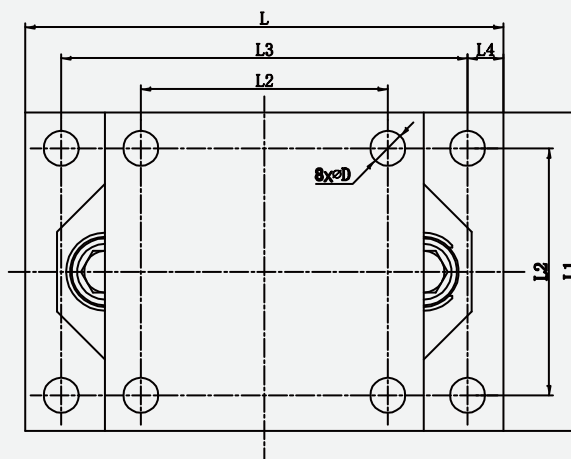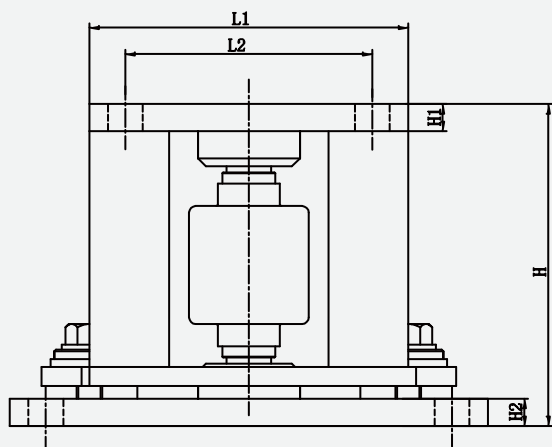

Cap(单位)	D	H	H1	H2	L	L1	L2	L3	L4
7.5~22.5t	22	152	12	17	300	200	155	255	22.5
10~70t	22	200	17	17	300	200	155	255	22.5
100t	32	263	30	33	440	300	235	375	32.5

GML-M410



柱式模块

Weighing module with canister load cells

适用于GML-Z4 A系列传感器；

结构紧凑，安装简便；


不锈钢及合金钢材质可选。

GML-Z4 A series are apply to this module;


Compact installation, easy installation;

Stainless steel and alloy steel selection.

单位Unit: mm


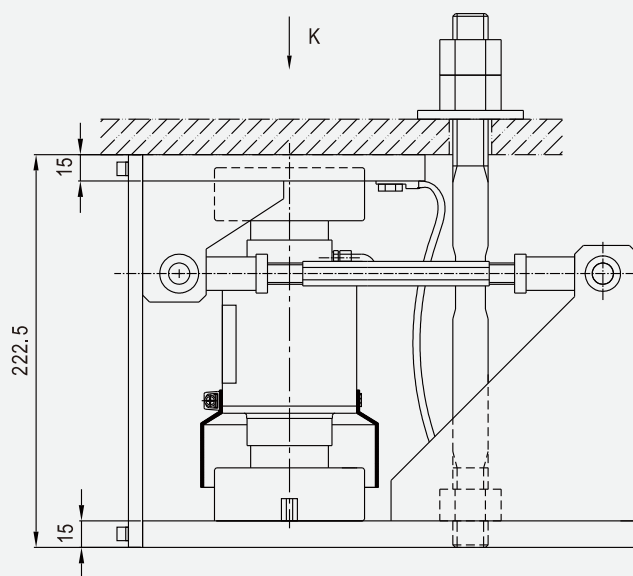


Top view, 顶视图, 无容器脚
drawing without tank foot


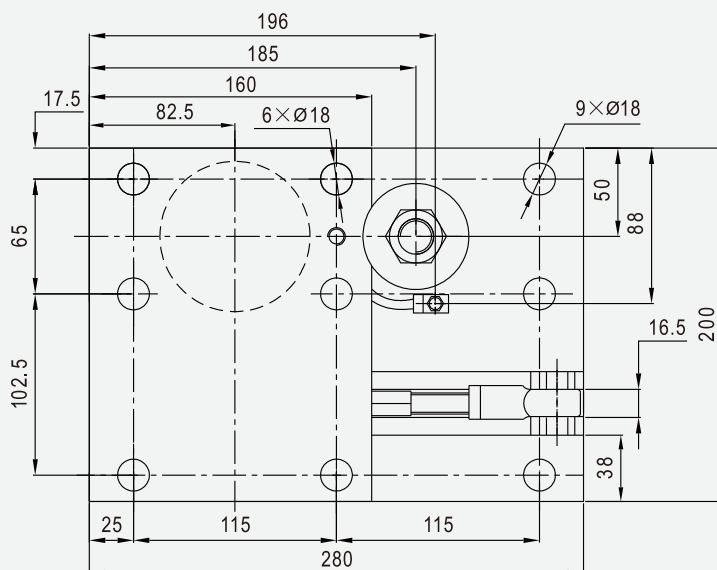


Mounting examples for weighing modules with stay rods: 带有支撑杆的称重模块安装示例

Cylindrical arrangement of the weighing module below tanks
称重模块在罐下部的圆形布置

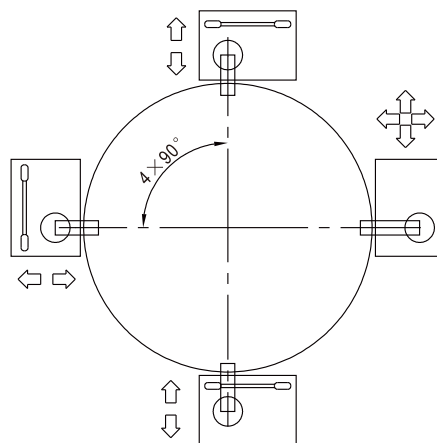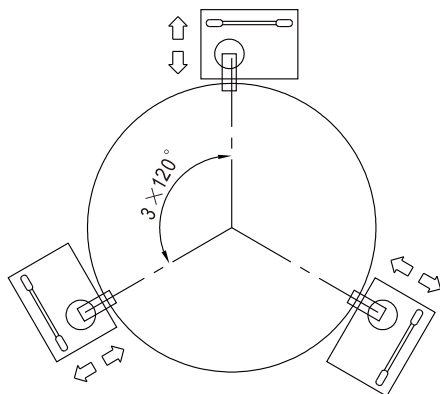

Rectangular arrangement of the weighing module below tanks
称重模块在罐下部的方形布置

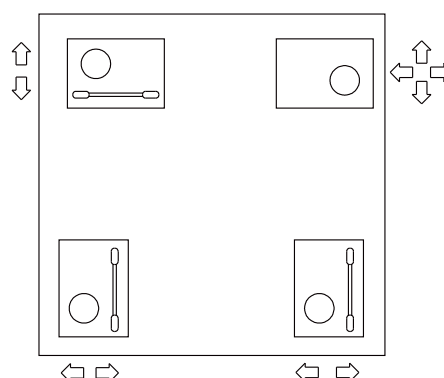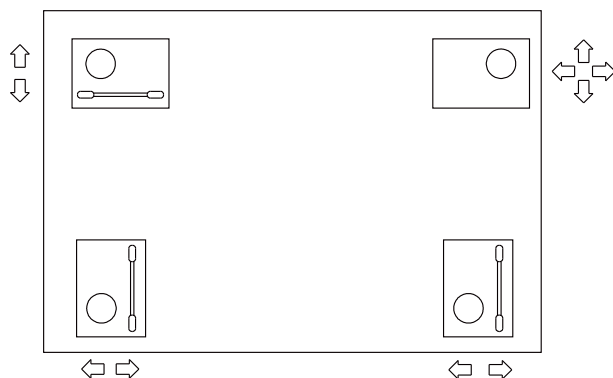

Remark备注: 

Stay rod 支撑杆 

Load introduction 负载方向 

Degree of freedom 自由度

Further accessory: 其他附件

Fixed bearings with the same installation height as the weighing module.
固定底座与称重模块是同样的高度；安装时具有替代作用。





关注杰曼微信公众号



关注杰曼抖音号



Facebook



Wechat



杰 • 曼 • 科 • 技

深圳市杰曼科技股份有限公司

General Measure Technology Co.,Ltd.

总部地址：深圳市南山区深圳国际创新谷6栋A座2208

制造基地：湖南省株洲市天元区新马动力创新园4.2期5号楼

无锡分公司：江苏省无锡市滨湖区滴翠路86号40601

联系方式：0755-86352007 | 0731-22831518

联系邮箱：yyyang@szgmt.com

官网网址：www.szgmt.com

Address: Room2208, Building 6, International Innovation Valley,
Nanshan District, Shenzhen, Guangdong Province, P.R.China.

Tel/Wechat: +86 185 6585 5789

E-mail: xjlv@szgmt.com

Website: www.gmweighing.com