


Duplex Packing Filler (3 load cells structure) AF-25KII



5-25kg
Weighing range

±15g
Best accuracy

2000 Pcs/h
Top speed

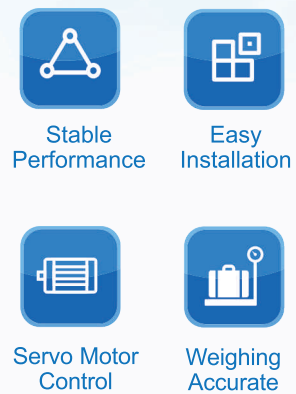


Features:

- **Granular material:** design for plastic particle, granular fertilizer, feeds and other granular material.
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 5-25kg. Speed can reach 2000 pcs/h, and best accuracy $\pm 15g$.



Optional:



Bag Clamp

- SS304 stainless steel.



vibrator feeding

Specification

Model	PaxGO AF-25KII (3 load cells structure)
Weighing range	5~25Kg
Division	1g
Best Accuracy*	$\pm 15g$
Top speed*	2000pcs/h
Volume	55L x 2
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304, carbon steel
I/O	8 output(5V), 8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ, 1KW
Working environment	0~40°C, 90%R.H condensation is not allowed

*Speed and accuracy depend on the density and flow rate of the materials.

Structure & Dimension

Unit: mm

