

# GRANULE PACKING FILLER

(Jumbo Bag Packing Function Available)





## AF-50K





**10-50kg**  
Weighing range

**±25g**  
Best accuracy

**1000** Pcs/h  
Top speed



**Optional:**  
• vibrator feeding

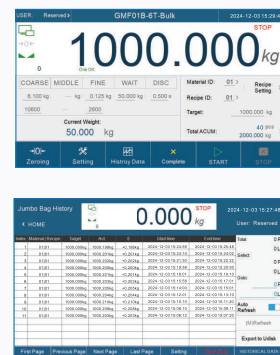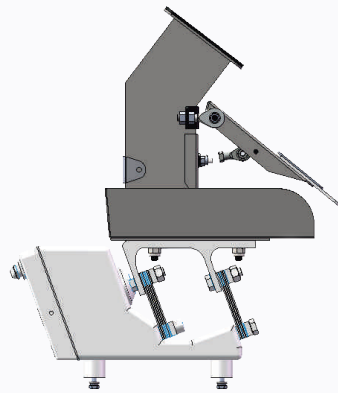

### Features:

- **Granular material:** design for free-flow granular materials such as plastic particles, rice, sugar and so on ;
- **Module design:** easy dismounting for cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** 1000 pcs/h , and best accuracy ± 25g.
- **Jumbo bag packing performance:** accuracy: ±500g, speed: 1t/min;
- **Jumbo bag packing function:** multi-pack continuous discharging available, fast feeding for speed and slow feeding of the last pack for accuracy;
- **History record:** every pack's entry and jumbo bag packing data recorded.



### Specification

Model	PaxGO AF-50K	AF-50K Jumbo Bag Packing
Weighing range	10~50Kg	500kg~50t
Division	1g	1g
Best Accuracy*	±25g	±500g
Top speed*	1000pcs/h	1t/min
Volume	86L	
Feeding method	Feeding control by servo, pneumatic discharging	
Material	SS304,carbon steel	
I/O	8 output(5V),8 input(24V)	
Communication	RS485,Modbus TCP/IP	
Pneumatic	0.4~0.6MPa	
Power	Single Phase AC-220V ±10%,50/60HZ,1KW	
Working environment	0~40°C , 90%R.H condensation is not allowed	

\*Speed and accuracy depend on the density and flow rate of the materials.

### Structure & Dimension

Unit: mm

