

# Duplex Packing Filler (3 load cells structure) AF-25KII



**5-25kg**  
Weighing range

**±5~15g**  
Accuracy range

**2400** Pcs/h  
Top speed



Stable  
Performance



Easy  
Installation




Servo Motor  
Control




Weighing  
Accurate

## Features:

- **Granular material:** design for plastic particle, granular fertilizer, feeds and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 5-25kg, Speed can reach 2400 pcs/h, and accuracy range  $\pm 5\sim 15g$ .




## Optional:



Bag Clamp

- SS304 stainless steel.



vibrator feeding




## Specification

Model	PaxGO AF-25KII (3 load cells structure)
Weighing range	5~25Kg
Division	1g
Accuracy range*	$\pm 5\sim 15g$
Top speed*	2400pcs/h
Volume	55L x 2
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304, carbon steel
I/O	8 output(5V), 8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V $\pm 10\%$ , 50/60HZ, 1KW
Working environment	0~40°C, 90%R.H condensation is not allowed

\*Accuracy depends on the natures of material and flow rate.  
Speed depends on the density and flow rate of the materials.

## Structure & Dimension

Unit: mm

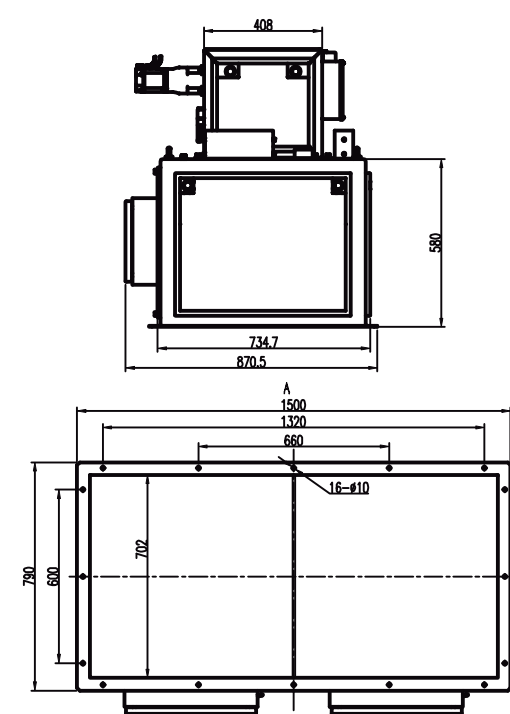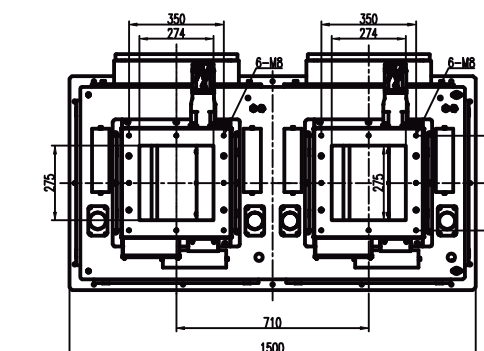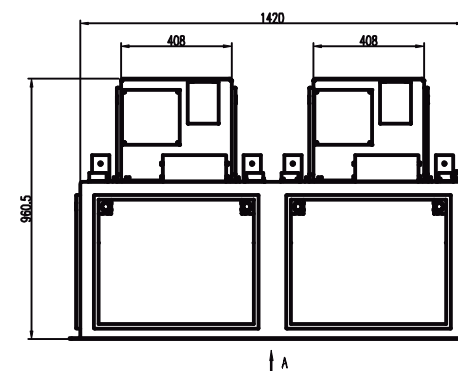

\*Specification and dimension may be upgraded, please consult sales manager for the latest info.