

GMT-P1

Weighing Transmitter

(Digital Version Available)



The GMT-P1 is a panel/harsh-mounted weighing transmitter that offers exceptional reliability, advanced filtering, and tested ability to perform stably under interference of harsh industrial environments. It is customized for dynamic weighing systems with the highest demand for reliability, response speed and accuracy.



FEATURES

- OIML R76 approval;
- With second generation anti-vibration filter;
- Support calibration without weights;
- 1,000,000 weight resolution ability;



HARDWARE HIGHLIGHTS

Standard

- RS232 or RS485 selectable by switch;
- 1 input 2 output I/O;

Options

- Single network port, support Modbus;
- Dual network ports, support ModbusTCP (No serial ports);
- Profinet or Ethernet IP or EtherCAT or CCLink IE (No serial ports);
- Analog output.

Digital Version

Standard

- RS232 or RS485 selectable by switch;
- RS485 for digital loadcell interface;
- 1 input 2 output I/O;

Options

- 16-bit analog output (Voltage/Current Type);

CC-Link IE EtherCAT

PROFINET

EtherNet/IP

Modbus TCP/IP

ANALOG OUTPUT




RS485/RS232

Specifications

General Specifications	Model	GMT-P1	GMT-P1 Digital Version
	Power	DC 24V±5%	
	Working temperature	-10°C~40°C	
	Maximum humidity	90% RH.without dew	
	Approval standards	OIML R76, ClassIII 6000 e, 1 μ V/e	
	Power consumption	About 10W	
Measurement Parameters	A/D performance	24 bit Delta-Sigma	N/A
	A/D conversion speed	30/60/120/240/480/960 times/sec	N/A
	Non-linearity	0.01%F.S	N/A
	Gain drift	10PPM/°C	N/A
	Input sensitivity	0.01μV/d	N/A
	Maximum input voltage	0~15mV	N/A
	Display Accuracy	1/1,000,000	1/1,000,000
	Load cell excitation	DC 5V,200mA(Max),Up to 8 load cells (350Ω) can be connected	DC12V, 250mA, up to connect 8 digital load cells
	Dust/water protection	The IP65 display when mounted into a panel	

Application

Unit:mm

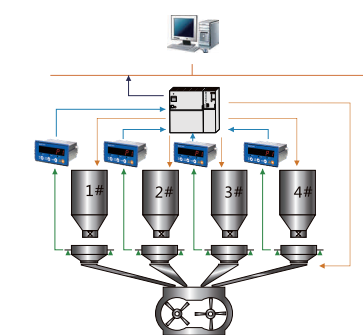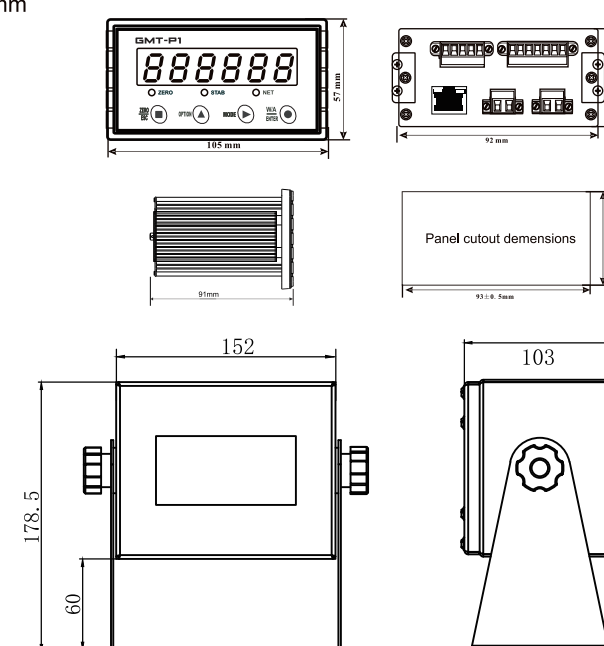

*Specification and dimension may be upgraded, please consult sales manager for the latest info.