


PNEUMATIC VERSION AF-50K



25-50kg
Weighing range



Stable
Performance



Easy
Installation

±10~25g
Accuracy range



Pneumatic
Cylinder Control



High Speed
Weighing

950 Pcs/h
Top speed

Features:


- **Granular material:** design for packing plastic particles, rice, sugar and other granular material;
- **Easy installation:** module design, easy for installation and dismount;
- **Convenient setup:** self-adjust function with target value set only;
- **High-speed performance:** pneumatic cylinder control, speed can reach above 950pcs/h;
- **Weighing accurate:** weighing range is 25~50kg, accuracy range is ±10~25g.

Optional:



10-inch touch screen

User-friendly interface design,
vivid display, easy to operate.




Specification

Model	PaxGO AF-50K Pneumatic Version
Weighing range	25~50Kg
Division	2g
Accuracy range*	±10~25g
Top speed*	950pcs/h
Volume	86L
Feeding method	Pneumatic cylinder control
Material	SS304, carbon steel
I/O	8 output(5V), 8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V ±10%, 50/60HZ, 1KW
Working environment	0~40°C, 90%R.H condensation is not allowed

*Accuracy and speed depends on the material characteristics and packing weight.

Structure & Dimension

Unit: mm

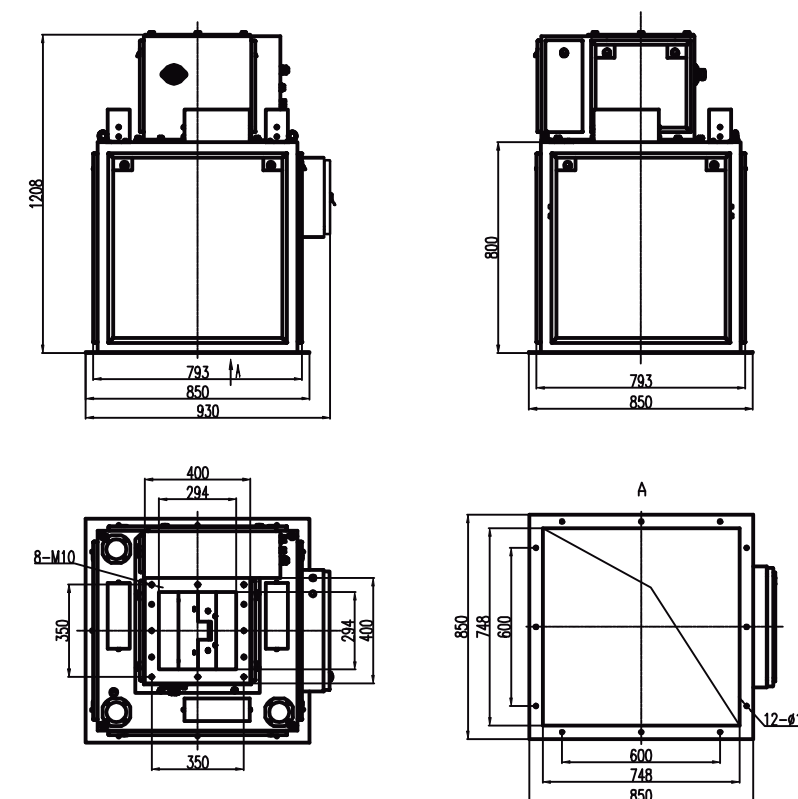

*Specification and dimension may be upgraded, please consult sales manager for the latest info.