


DUPLEX PACKING FILLER AF-1KII



Stable
Performance



Easy
Installation



Pneumatic
Cylinder Control



High Speed
Weighing



Features:

• High speed and accuracy:

the highest speed can reach 3600pcs/h and the accuracy range is $\pm 1 \sim 3g$;

• Granular materials:

special designed for small weighing range packages, like rice, millet, beans and so on;

• Stable performance:

step motor + vibrator feeding-type, pneumatic discharging-type;

• Parameter setting:

self-adjust function with target value set only, easy operation.




Specification

Model	PaxGO AF-1KII
Weighing range	0.05~1Kg
Division	1g
Accuracy range*	$\pm 1 \sim 3g$
Top speed*	3600 pcs/h
Volume	2.8L x 2
Feeding method	Step motor + vibrator feeding-type, pneumatic discharging-type;
Material	Carbon steel/stainless steel optional
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa 2m ³ /h
Power	AC 220V $\pm 10\%$, 50/60HZ, 400W
Working environment	0~40°C, 90%R.H condensation is not allowed

*Accuracy and speed depends on the material characteristics and packing weight.

Structure & Dimension

Unit: mm

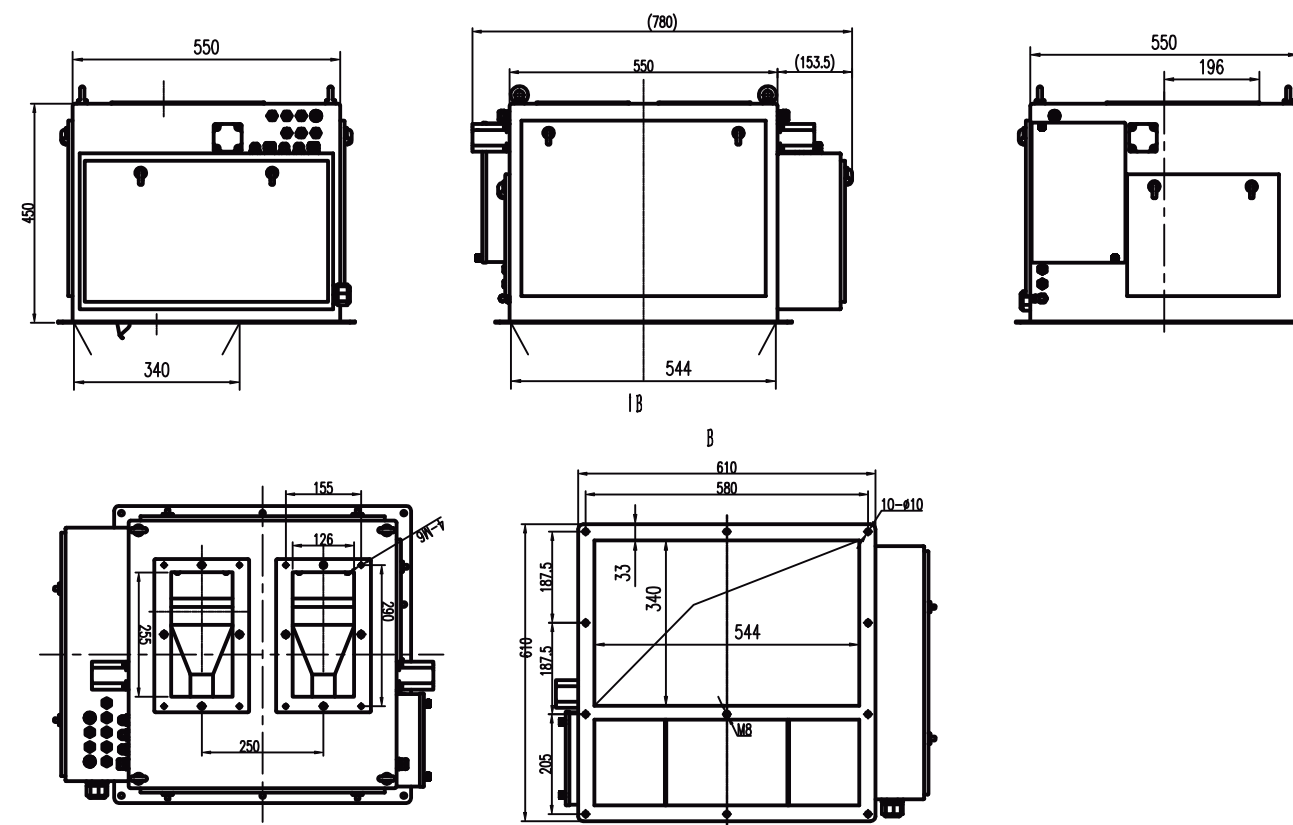

*Specification and dimension may be upgraded, please consult sales manager for the latest info.