






# DUPLEX PACKING FILLER AF-50K II

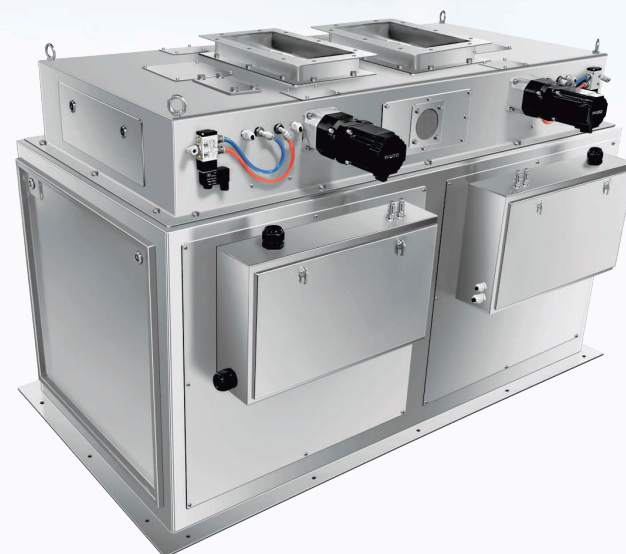

**10-50<sub>kg</sub>**  
Weighing range

**±10~25<sub>g</sub>**  
Accuracy range

**1800<sub>Pcs/h</sub>**  
Top speed



## Features:

- **Granular material:** design for packing plastic particles, rice, sugar and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 10-50kg, Speed can reach 1800 pcs/h, and accuracy range  $\pm 10\sim 25g$ .

## Optional:



User-friendly interface design,  
vivid display, easy to operate.




## Specification

Model	PaxGO AF-50K II
Weighing range	10~50Kg
Division	2g
Accuracy range*	$\pm 10\sim 25g$
Top speed*	1800pcs/h
Volume	86L x 2
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304, carbon steel
I/O	8 output(5V), 8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V $\pm 10\%$ , 50/60HZ, 2KW
Working environment	0~40°C, 90%R.H condensation is not allowed

\*Accuracy and speed depends on the material characteristics and packing weight.

## Structure & Dimension

Unit: mm

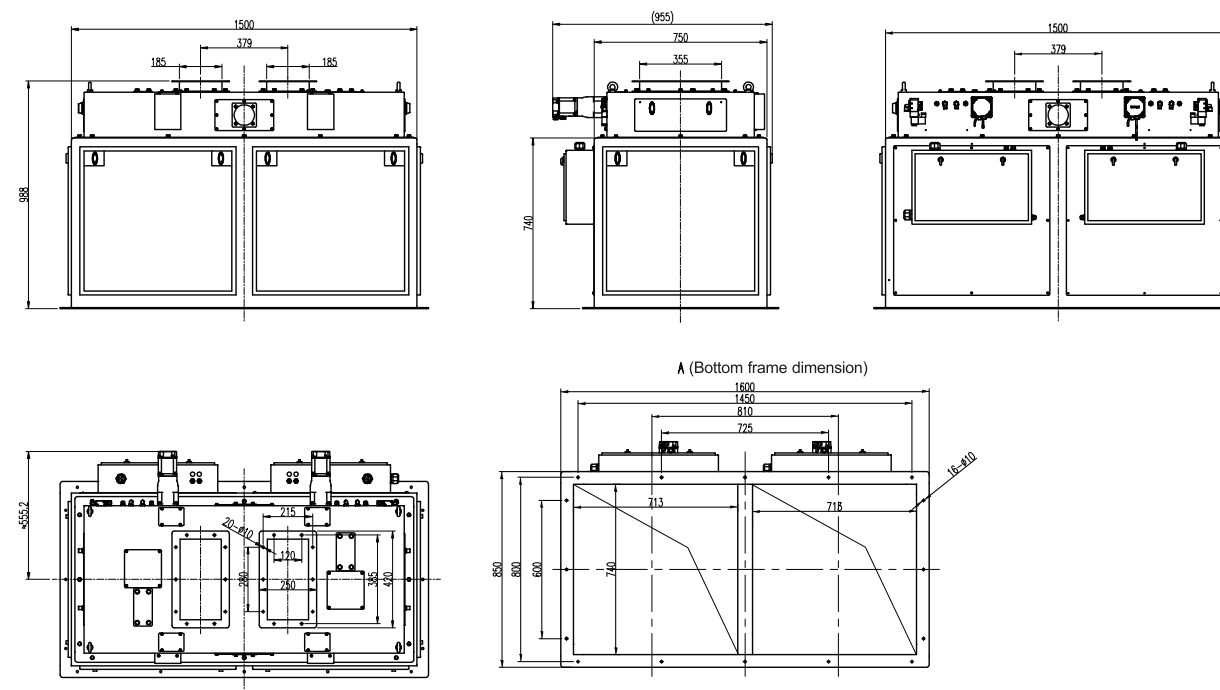

\*Specification and dimension may be upgraded, please consult sales manager for the latest info.