

GRANULE PACKING FILLER AF-25K



5-25 kg
Weighing range

±5~15g
Accuracy range

1200 Pcs/h
Top speed



Stable
Performance



Easy
Installation



Servo Motor
Control



Weighing
Accurate

Features:

- **Granular material:** design for plastic particle, granular fertilizer, feeds and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 5-25kg, Speed can reach 1200 pcs/h, and accuracy range $\pm 5\sim 15g$.




Optional:



Bag Clamp

- SS304 stainless steel.



vibrator feeding


Specification

Model	PaxGO AF-25K
Weighing range	5~25Kg
Division	1g
Accuracy range*	$\pm 5\sim 15g$
Top speed*	1200pcs/h
Volume	55L
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(24V),8 input(24V)
Communication	RS485,Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V $\pm 10\%$,50/60HZ,1KW
Working environment	0~40°C , 90%R.H condensation is not allowed


*Accuracy and speed depends on the material characteristics and packing weight.

Structure & Dimension


Unit: mm

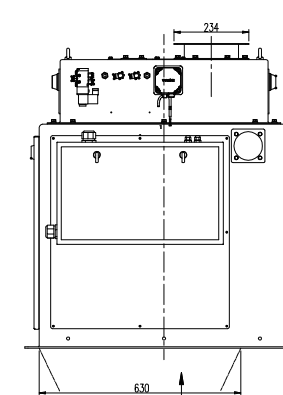


A (Bottom frame dimension)

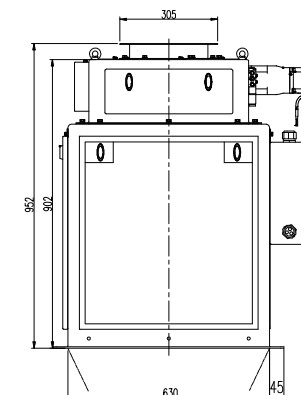


B (Feeding port dimension)



A (Bottom frame dimension)



B (Feeding port dimension)



*Specification and dimension may be upgraded, please consult sales manager for the latest info.