

ChexGo Series

Dynamic Checkweigher



Weasy -- Weighing Easy



Designed for dynamic weighing application



30+years R&D experience in weighing control

ChexGo Series checkweigher with the feature of high speed, accuracy and stable performance can work well in the harsh industrial environment. Assuring the **100%** product weighing detection under the law and regulation, it will reduce the customer complains and protect enterprise fame. Whilst replacing the manpower to lower the cost, ChexGo can help you to increase efficiency of the production line and avoid risks.



Easy operation



Accurate weighing



Abundant function



Stable and reliable




Stable, flexible and accurate design



High efficient and better performance

Anti-interference design

Professional circuit design, the weighing control box is passed EMC test, which can resist the power and electromagnet interference and maintain the stable operating.

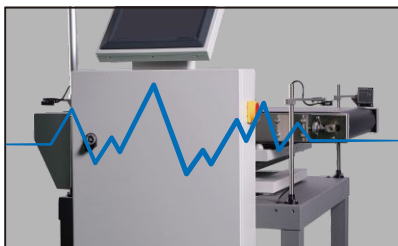

Adjustable material orientation guider

- Ensure the object stable moving;
- Decrease the vibration;
- S304 Stainless steel.




Anti-corrosion paint protection

All control panel is protected by anti-corrosion paint, which is moisture proof, dust proof, insulation and anti-vibration.



Abundant function, easy integration


- Standard Modbus TCP/IP, RS485 communication
- Support connecting to labeling machine, ink-jet printer
- Support connecting to printer to print weighing data records.

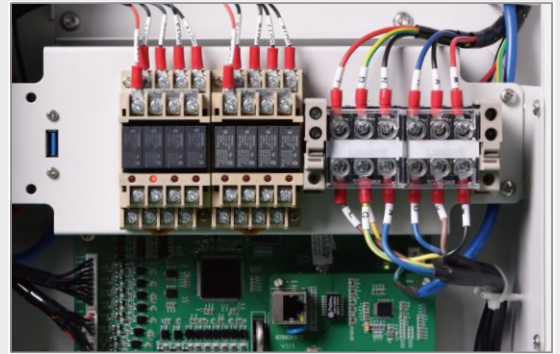

Printing Function

When communication is set as print and checkweigher is connected to the printer, the weighing data records can be printed on the interface of statistic result or by sending the print order via communication.

DATE:	2020.6.18	Up separate line
TIME:	15:31	Print date
PRODUCT CODE:	1	Print time
TARE WT:	0.000kg	Product code
UP LIM:	0.030kg	Tare value
REF WT:	8.135kg	Overweight value
LOW LIM:	0.030kg	Target weight
PASS CT:	1	Underweight value
PASS WT:	8.140kg	Total pass time
PASS AVR:	8.140kg	Total pass weight
PASS RATE:	100.00%	Average pass weight
OVER CT:	0	Pass rate
OVER WT:	0.000kg	Total overweight time
UNDER CT:	0	Total overweight value
UNDER WT:	0.000kg	Total underweight time
TOTAL CT:	1	Total underweight value
TOTAL WT:	8.140kg	Total test time
MIN WT:	8.140kg	Total test weight
MAX WT:	8.140kg	Minimum weight
		Maximum weight
		Down separate line




USB Memory Port

- Data acquisition;
- Program update.


Multi-type Rejector

Multi-Rejector option, flap method, swing arm, push type – flexible design.


Arm Rejector




Air Jet Rejector



Push Plate Rejector




Drop Up Belt Rejector






User-friendly design


- 10-inch color user friendly touch screen and graphical design interface. Simple operation without professional training.

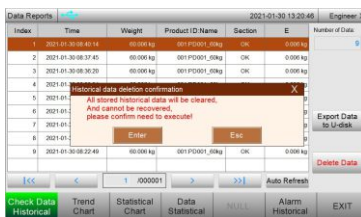


- A million product formula storage. Users/Admin can easily add or delete data.

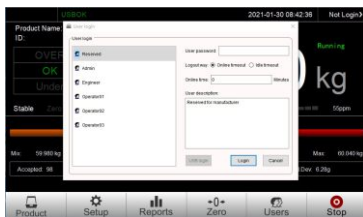

- 3 levels of administration authority for well-organized management.

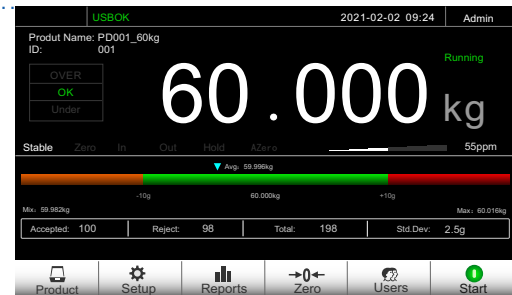

- Advanced and sophisticated software algorithm makes sure the accuracy, as well as high speed dynamic responses.

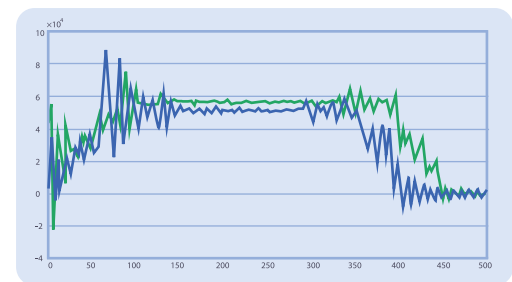


— Traditional waveform — Now waveform

▲ Weighing sampling waveform




Well-organized data management

- A million data details record including serial number, time and result for admin to check errors. Data summary report can be exported through USB and RS485.

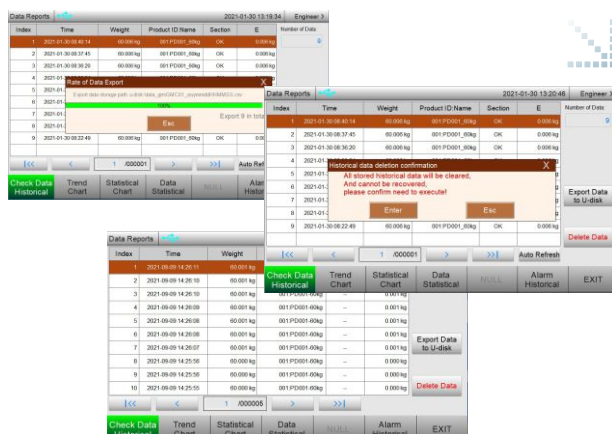


- Weight fluctuation chart reflects the product's weight conditions from the macro perspective.

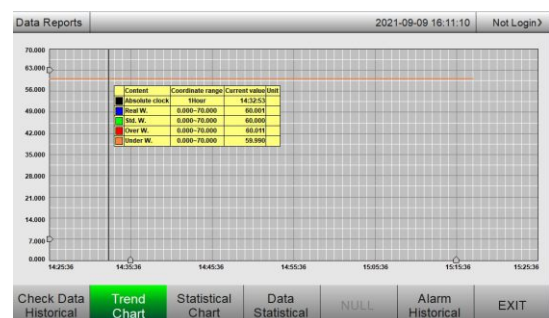

DYNAMIC CHECKWEIGHER CW-100G

- This product is widely used in Pharmaceutical production lines for highest weighing accuracy and repeatability;
- The checkweigher monitor manufacturing efficiencies and provide real-time data on your process;
- Product completeness and trends also provide feedback data to production line;
- It is also used in the application of checking completeness of secondary package to identify any missing items.

Multiple industrial application



Food



Pharmacy



Accessories



1-500g

Weighing range



±0.1g

Accuracy



180 + Pcs/min

Speed




Standard specification

Model	CW-100G
Weighing range	1~500g
Scale division	0.05g
Highest Accuracy(3 σ) *	± 0.1 g
Highest Weighing speed *	180 pcs/min
Belt speed	5~60 m/min
Belt size	250×100mm
Weighing platform Height **	750±50mm
Tested object size	Length: 50~180mm Width: 20~80mm Height: 10~150mm
Belt material	PVC (white)
Structure of the material	Carbon steel, SS304 stainless steel (weighing platform)
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, air blow type, push type or lift up type rejector
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ
operating temperature	0~40°C
IP grade	IP54 ,IP65 Optional

*Depend on the weight, size, and material of test object. Test accuracy: 0.1g at 100pcs/min; 0.3g at 180pcs/min.

Dimensions


Unit:mm

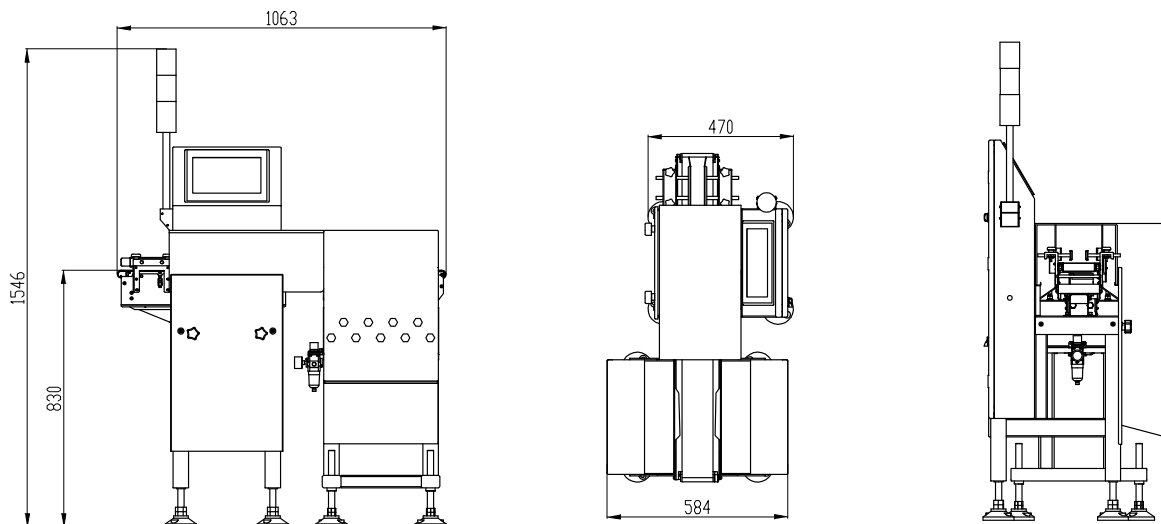

DYNAMIC CHECKWEIGHTER CW-100G Pro

- This product is widely used in Pharmaceutical production lines for highest weighing accuracy and repeatability;
- The checkweigher monitor manufacturing efficiencies and provide real-time data on your process;
- Product completeness and trends also provide feedback data to production line;
- It is also used in the application of checking completeness of secondary package to identify any missing items.

Multiple industrial application



Food



Pharmacy



Accessories

1-500g

Weighing range

±0.1g

Accuracy

300

 + Pcs/min

Speed





Stable
Performance



Easy
Installation



Abundant
Function



Weighing
Accurate

Core components

- MCGS Touch Screen



- XINJE Servo Motor



- NSK Bering



- Schneider Electronic





- HBM Load Cell



- FESTO Solenoid Valve



- GMC01 Controller

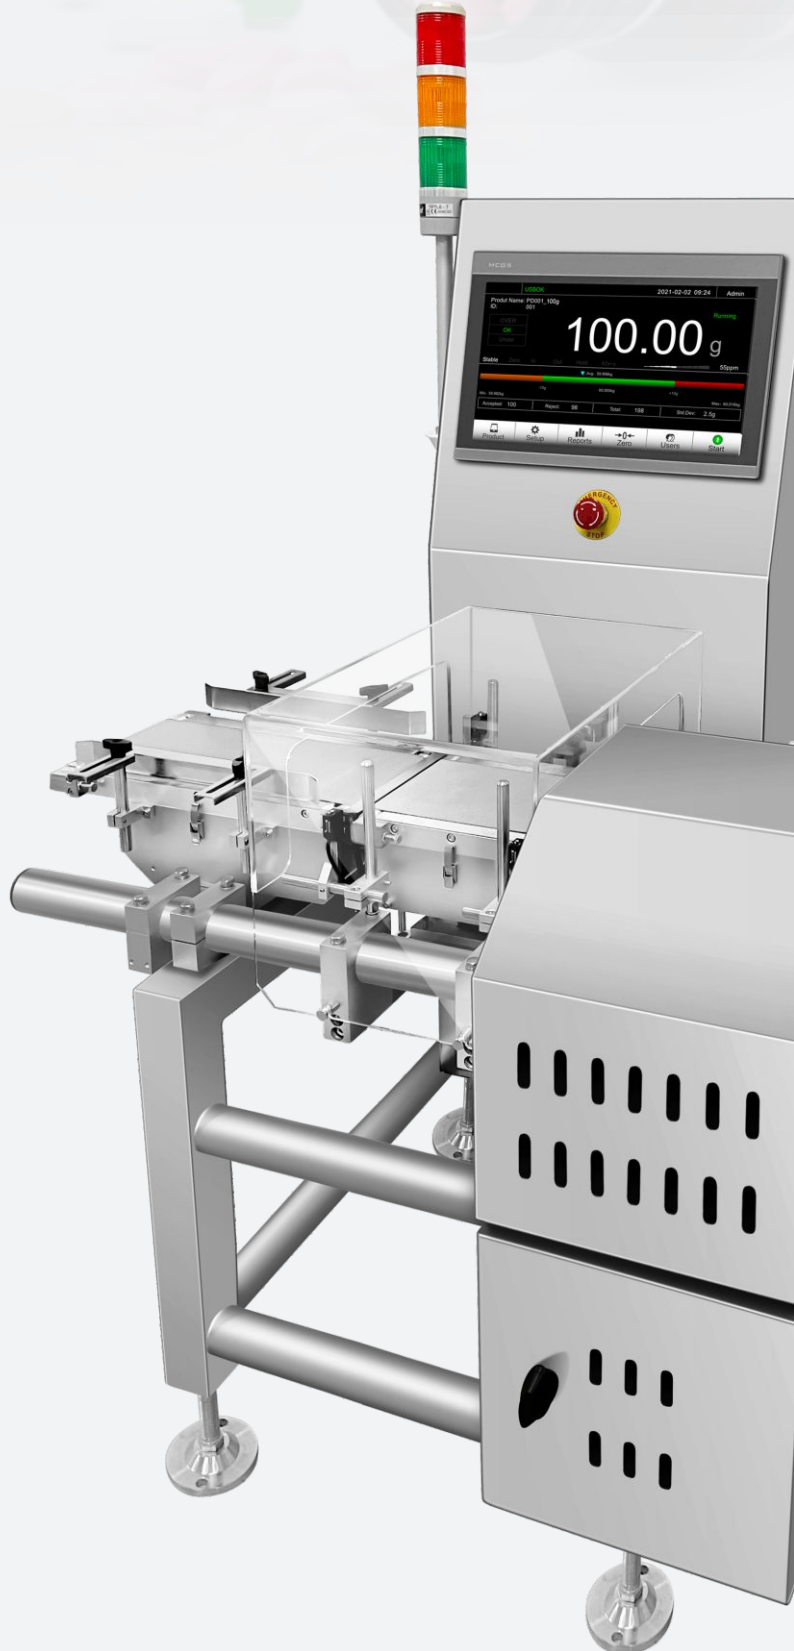


Standard specification

Model	CW-100G Pro
Weighing range	1~500g
Scale division	0.05g
Highest Accuracy(3σ) *	±0.1 g
Highest Weighing speed *	300 pcs/min
Belt speed	10~70 m/min
Belt size	200×150 mm
Weighing platform Height **	750±50mm
Belt material	PVC (white)
Structure of the material	SS304 stainless steel
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	15-inch color touch screen
Rejector lineup	Air blow type
Power	Single Phase AC-220V ±10%, 50/60HZ
operating temperature	0~45℃
IP grade	Ip65

*Depend on the weight, size, and material of test object. Test accuracy: 0.1g at 120pcs/min | 0.2g at 200pcs/min

Dimensions

Unit:mm

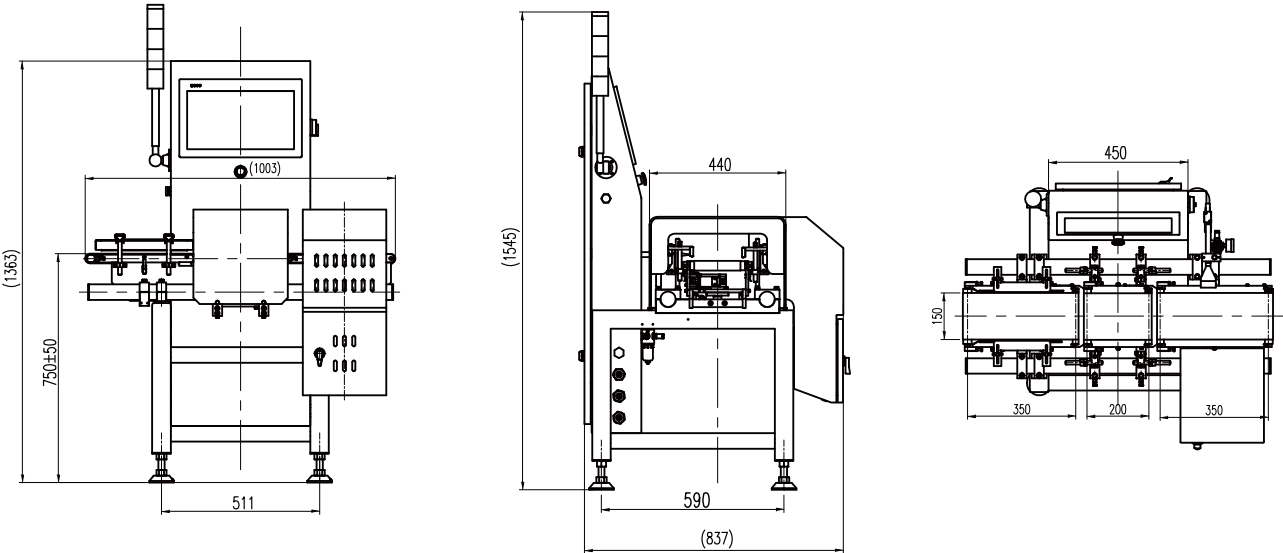

DYNAMIC CHECKWEIGHTER CW-600G

- This checkweigher is suitable for standard applications in food and other industries;
- System can store 100 product options for a wide variety of open or closed products in food and industrial production environments;
- System can be intergrated with metal detector.

Multiple industrial application



Food



Chemical



Accessories



10-600g
Weighing range



±0.5g
Accuracy



200 + Pcs/min
Speed




Standard specification

Model	CW-600G
Weighing range	10~600g
Scale division	± 0.1g
Highest Accuracy(3 σ) *	0.5g
Highest Weighing speed *	200 pcs/min
Belt speed	5~60 m/min
Belt size	310×250mm
Weighing platform Height **	750±50mm
Tested object size	Length: 50~240mm Width: 20~150mm Height: 10~180mm
Belt material	PVC (white)
Structure of the material	Carbon steel, SS304 stainless steel (weighing platform)
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type or lift up type rejector
Power	Single Phase AC-220V ±10%, 50/60HZ
operating temperature	0~40°C
IP grade	IP54 ,IP65 Optional

* Depend on the weight, size, and material of test object. Test accuracy: 0.5g at 200pcs/min

Dimensions

Unit:mm

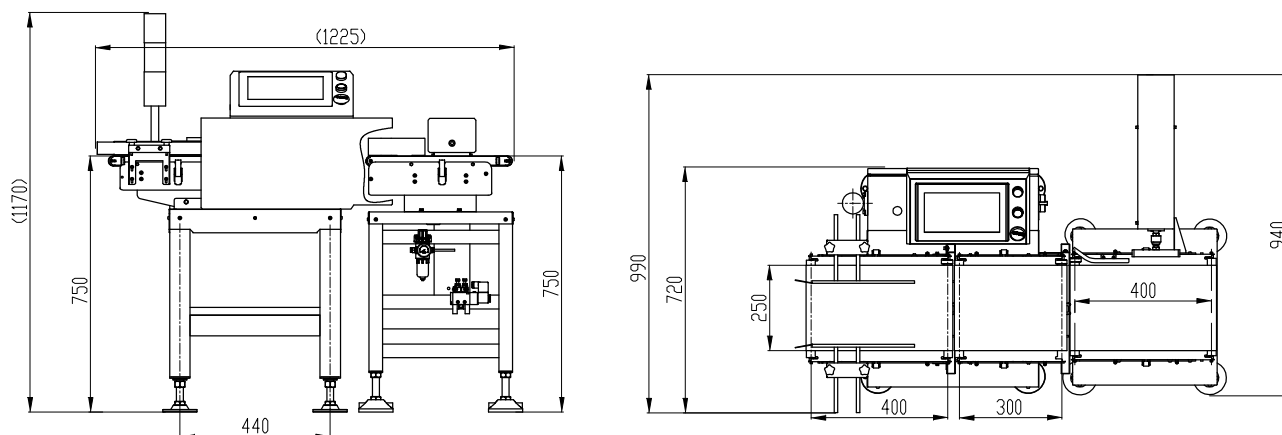

DYNAMIC CHECKWEIGHER CW-1.2K

- For pouches, bags, and soft-sided containers, bottles;
- S304 stainless steel frame is standard;
- 10 inch touch screen, can store over 1 million transaction, data export through USB;
- High speed at 200 pcs per min, with 0.5 gram.

Multiple industrial application



Food



Grain



Chemical



10-1200g

Weighing range



±0.5g

Accuracy



200+Pcs/min

Speed



High Cabinet



Low Cabinet

Standard specification


Model	CW-1.2K
Weighing range	10~1200g
Scale division	0.1g
Highest Accuracy(3 σ) *	$\pm 0.5g$
Highest Weighing speed *	200 pcs/min
Belt speed	5~50 m/min
Belt size	400×250mm
Weighing platform Height **	750±50mm
Belt material	PU (white)
Structure of the material	SS304 stainless steel
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type , flipped type rejector
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ
operating temperature	0~40°C
IP grade	IP54,IP65 Optional

* Depend on the weight, size, and material of test object. Test accuracy: 1g at 200pcs/min


Dimensions

Unit:mm

Low Cabinet

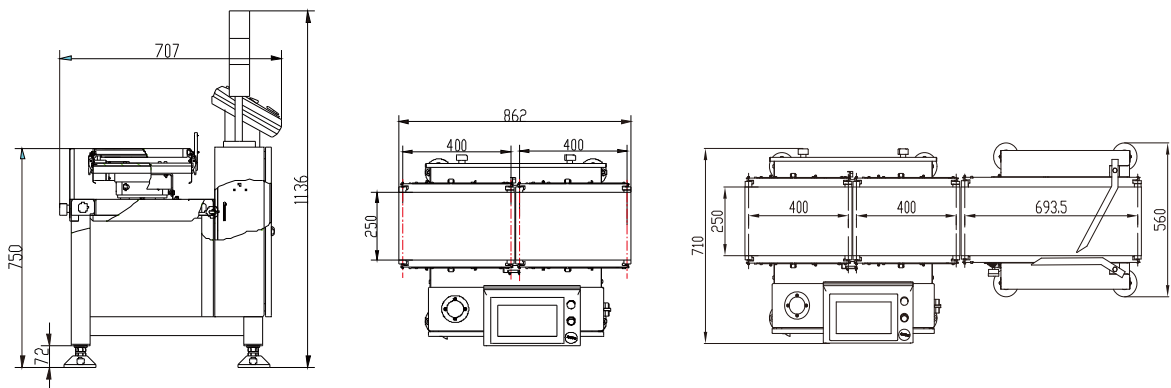

High Cabinet

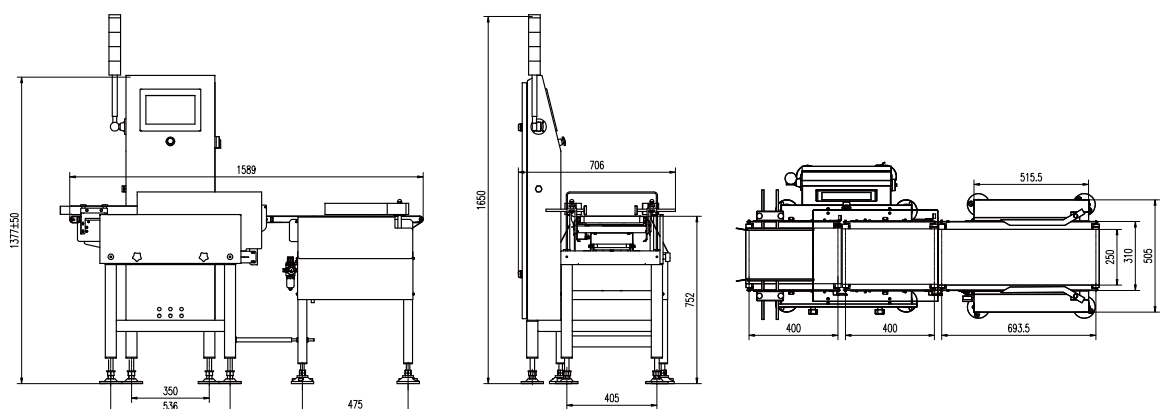

WEIGHT CHECK & SORTING MACHINE CW-1.2K

- Can be used for sorting 5 to 7 grades of weight;
- For raw food, bags, bottles, containers and so on;
- SS304 stainless steel;
- 10-inch touch screen;
- Can store over 1 million entries, data export by USB.

Multiple applications



10-1200g


Weighing range

±0.5g

Accuracy

120+ Pcs/min

Speed

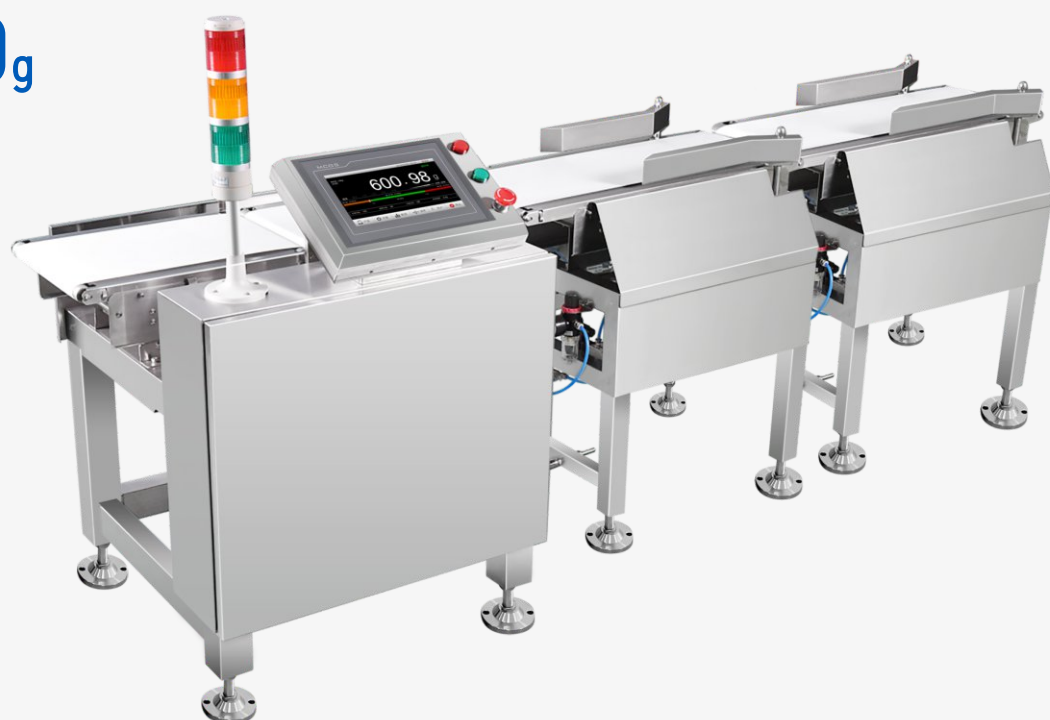


Specification

Model	CW-1.2K
Weighing range	10~1200g
Scale division	0.1g
Highest Accuracy(3 σ) *	$\pm 0.5g$
Highest Weighing speed *	120 pcs/min
Belt speed	5~50 m/min
Belt size	400×250mm
Weighing platform Height **	750±50mm
Tested object size	Length: 50~300mm Width: 20~220mm Height: 10~220mm
Belt material	PU (white)
Structure of the material	SS304 stainless steel
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type rejector
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ
operating temperature	0~40°C
IP grade	IP65

* Depend on the weight, size, and material of test object. Test accuracy: **1g at 120pcs/min**

Dimensions

Unit:mm

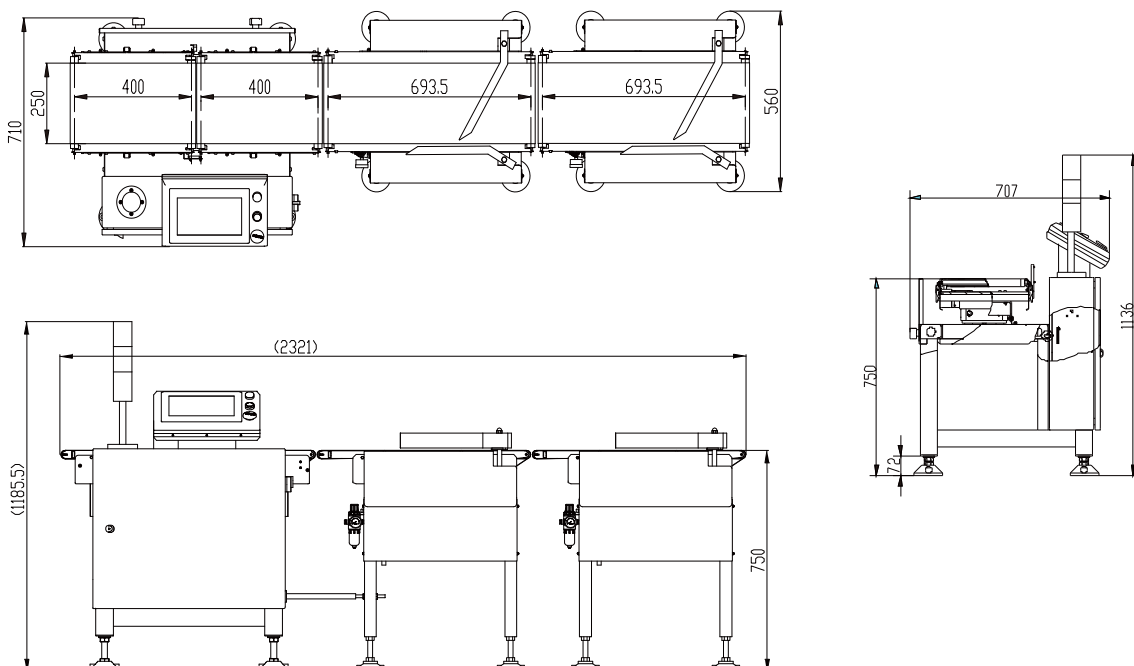

CHECKWEIGHER WITH METAL DETECTOR CW-1.2K

CW-1.2K is a high speed and accuracy checkweigher with weight check and metal detection function.

Feature Highlight:

- 10-inch touch screen, easy operation;
- External expansion of IO port, serial port and network communication to achieve product management, monitoring and remote control;
- Widely used in food, pharmaceutical, daily use chemical, textile and other industries.



10-1200_g

Weighing range

±0.7_g

Accuracy

100_{+ Pcs/min}

Speed

Metal Detection Sensitivity

Fe ≥ φ0.8mm

Sus304 ≥ φ2.0mm

Non-Fe ≥ φ1.5mm




Standard Specification

Model	CW-1.2K
Power	AC 220V \pm 10% , 50/60Hz , 400W
Weighing Range	100~1200g
Weighing Accuracy	\pm 0.7g
Weighing Speed	\leq 100 pcs/min
Belt Speed	5~40 m/min
Belt Size	400mm*250mm
Belt Materia	PU White
Structure Material	304 Stainless Steel
Rejector	Optional: swing arm, push type, air blow
Metal Detection Sensitivity*	Fe \geq ϕ 0.8mm Sus304 \geq ϕ 2.0mm Non-Fe \geq ϕ 1.5mm
Metal Detector Wide	250mm
Metal Detector Height	Optional: 80mm/100mm/120mm/150mm/200mm
Platform Height	750 \pm 50mm
Working Temperature	0~40°C
Maximum Humidity	90% R.H No Condensation
Limit Load	The instantaneous load shall not exceed 2.4kg

*Metal detection sensitivity is related to test object features (humidity, temperature, salinity, mineral content, etc.), as well as some environmental effects, such as vibration, electromagnetic field interference, etc.,

Structure & Dimension

Unit: mm

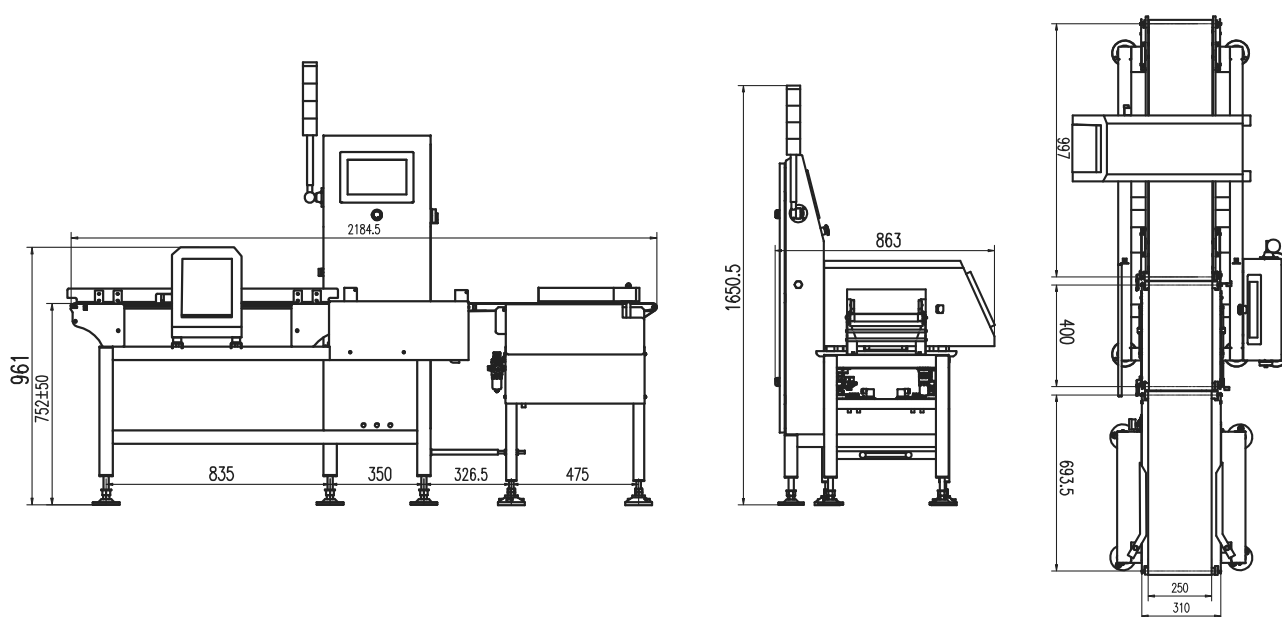

LinkedIn



Facebook



Wechat

DYNAMIC CHECKWEIGHTER CW-3K

- CW-3K check weigher is suitable for product weight range from 0.3~3kg;
- Weighing accuracy is $\pm 0.5 \sim 1.5g$;
- 10-inch touch screen, can store over 1 million transaction, data export through USB;
- It is widely used for food and beverage, pet food, daily use chemical industry, and so on.

Multiple applications



0.3-3 kg
Weighing range



$\pm 0.5g$
Accuracy



150 +Pcs/min
Speed




Specification

Model	CW-3K
Power	AC220V \pm 10%, 50/60Hz, 1200W
Weighing Range	0.3~3kg
Accuracy	\pm 0.5~1.5g
Speed	\leq 150pcs/min
Belt Speed	10~90m/min
Belt Size	400mm*300mm
Roller Distance(center)	400mm
Platform Height	750 (\pm 50mm) (customizable)
Temperature	0~40°C
Humidity	90% R.H No Condensation
Limit Load	The instantaneous limit load shall not exceed 5 kg

Dimensions

Unit:mm

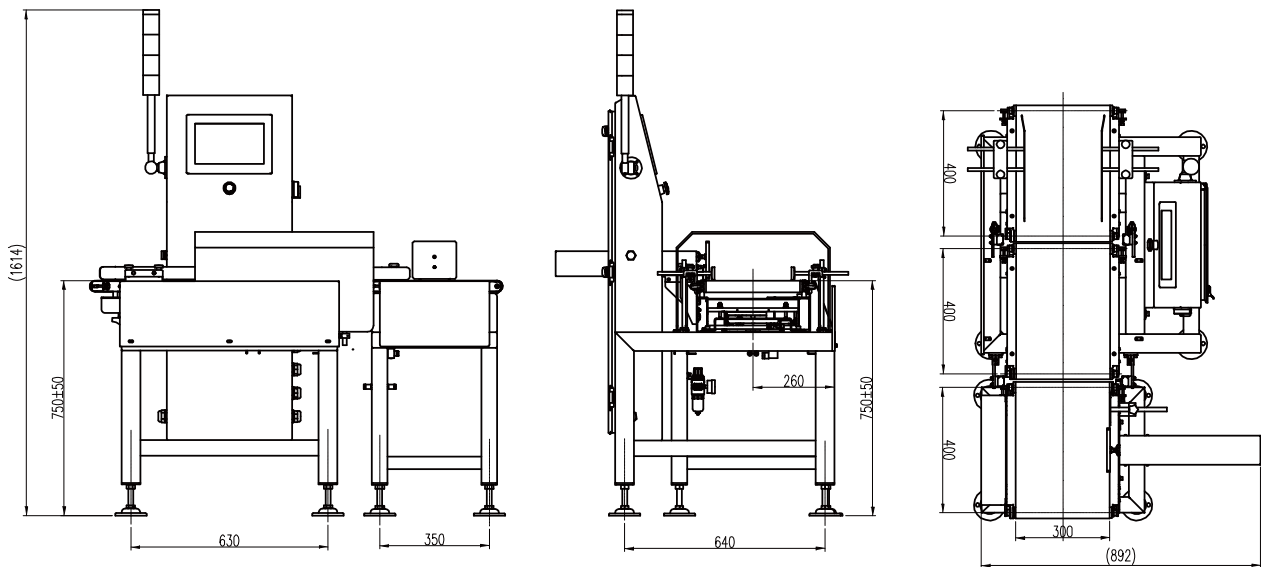

DYNAMIC CHECKWEIGHER CW-6K

- CW-6K check weigher is suitable for product weight range from 0.5-6kg.
- Weighing accuracy is within $\pm 2g$;
- 10-inch touch screen, can store over 1 million transaction, data export through USB;
- It is widely used for food, feeds, logistic industries, automation production line, and so on.

Multiple industrial application



Feeds



Logistic




Automation production
line



0.5-6kg
Weighing range



$\pm 2g$
Accuracy



100 $+Pcs/min$
Speed




Standard specification

Model	CW-6K
Weighing range	0.5~6kg
Scale division	1g
Highest Accuracy(3 σ) *	± 2 g
Highest Weighing speed *	100+pcs/min
Belt speed	10~50m/min
Belt size	500*400mm
Weighing platform Height **	750 \pm 50mm
Tested object size	Length100~420mm, Width50~400mm, Height50~400mm
Belt material	PU
Structure of the material	Carbon steel, SS304 for weighing platform
Alarm light	3-color signal light (Red, yellow, green)
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type
Power	AC220V single phase, 50/60Hz, 850W
operating temperature	0~40°C
IP grade	IP54,IP65 Optional

*Depend on the weight, size and material of test object.

Dimensions

Unit:mm

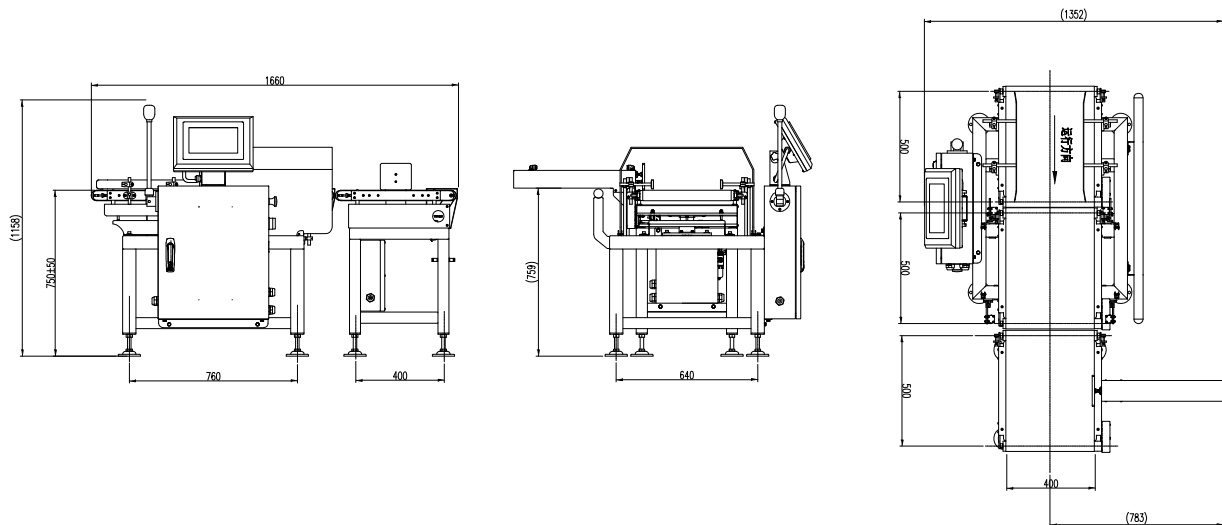

General Measure Technology Co.,Ltd.

Address: Room2208, Block A, Building 6, Shenzhen International Innovation Valley,
Nanshan District, Shenzhen, Guangdong Province, P.R.China.
Tel/Wechat: +86 185 6585 5789
E-mail: xjlv@s zgmt.com
Website: www.gmweighing.com



Linkedin



Facebook



Wechat


DYNAMIC CHECKWEIGHER CW-15K

- Heavy load, for product weight up to 15kg, with accuracy $\pm 5g$;
- 10-inch screen, easy to operate;
- 100 different products storage;
- Widely used for checking weight of products in boxes, bags, barrel, etc.


Multiple industrial application



Feeds



Logistic



Automation



1-15 kg
Weighing range



$\pm 5g$
Accuracy



85 $+Pcs/min$
Speed




Standard specification

Model	CW-15K
Weighing range	1~15kg
Scale division	1g
Highest Accuracy(3 σ) *	± 5 g
Highest Weighing speed *	85pcs/min
Belt speed	45~68m/min
Belt size	800×500mm
Weighing platform Height **	750±50mm
Tested object size	Length: 100~600mm Width: 50~450mm Height: 50~500mm
Belt material	PVC (black)
Structure of the material	Carbon steel, SS304 stainless steel (weighing platform)
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	optional
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ
operating temperature	0~40°C
IP grade	IP54,IP65 Optional

*Depend on the weight, size and material of test object.

Dimensions

Unit:mm

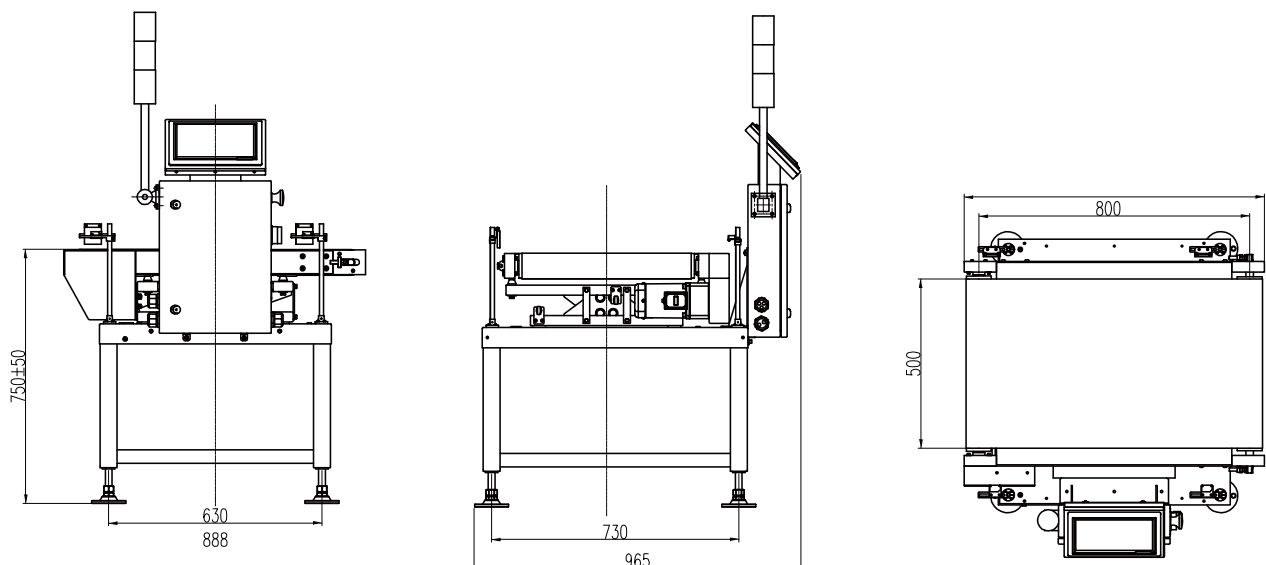


DYNAMIC CHECKWEIGHER CW-30K

- Heavy load, for product weight up to 30kg, with accuracy $\pm 5g$;
- 10-inch screen, easy to operate;
- 100 different products storage;
- Widely used for checking weight of products in boxes, bags, barrel, etc.

Multiple industrial application



Feeds



Logistic



Automation production line



1-30 kg
Weighing range



$\pm 5g$
Accuracy



40 $+Pcs/min$
Speed




Standard specification

Model	CW-30K
Weighing range	1~30kg
Scale division	1g
Highest Accuracy(3 σ) *	± 5 g
Highest Weighing speed *	30~40pcs/min
Belt speed	22~34m/min
Belt size	500*400mm
Weighing platform Height **	750 \pm 50mm
Belt material	PVC
Structure of the material	Carbon steel, SS304 for weighing platform
Alarm light	3-color signal light (Red, yellow, green)
Display size	10-inch color touch screen
Rejector lineup	Options: swing type, push type
Power	AC220V single phase, 50/60Hz, 850W
operating temperature	0~40°C
IP grade	IP54,IP65 Optional

*Depend on the weight, size and material of test object.

Dimensions

Unit:mm

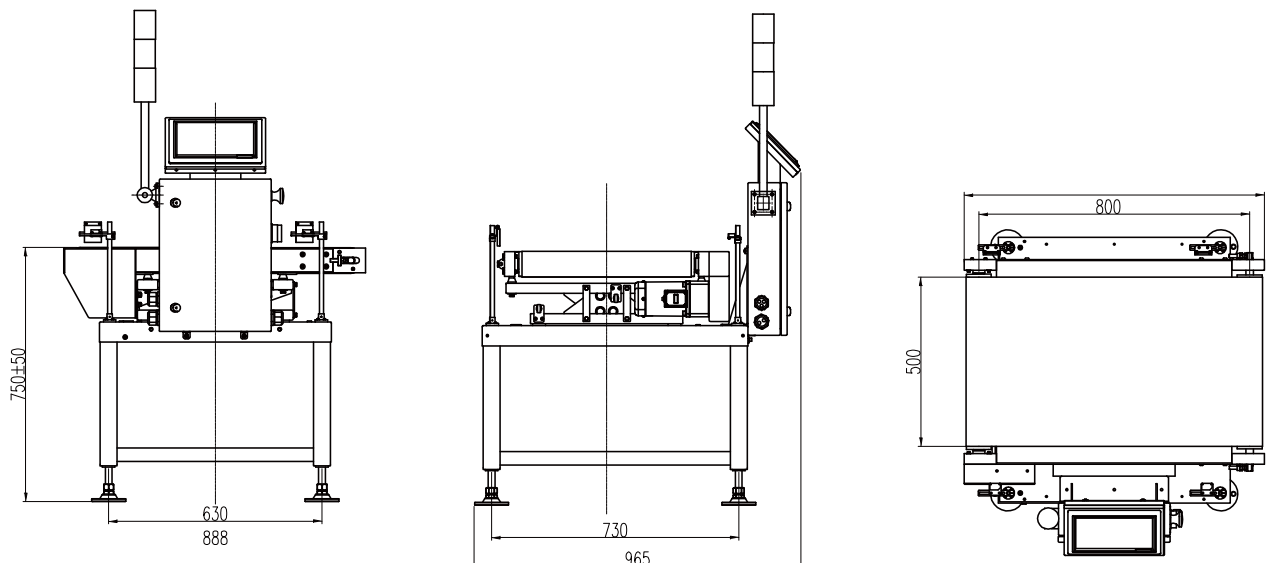

DYNAMIC CHECKWEIGHER CW-60K

- Heavy load heavy duty, for bags ,boxes weight up to 60kg with accuracy within 10 grams;
- Strong structure for hash environment, option S304 S316 structure, option stainless loadcell;
- Using 4 loadcells for plat form, with variable mounting position for high accuracy under ruff environment;
- Flexible Modbus communication to integrate with computer, scanner, dimension measure device and soon.

Multiple industrial application



Logistic



Automation



Grain and feeds




0.1-60_{kg}

Weighing range



±10_g

Accuracy



60_{+Pcs/min}

Speed




Standard specification

Model	CW-60K
Weighing range	0.1~60Kg
Scale division	5g
Highest Accuracy(3 σ) *	± 5 g
Highest Weighing speed *	60pcs/min
Belt speed	10~60m/min
Belt size	1000/1200×600mm
Weighing platform Height **	400~750mm (± 50 mm)
Tested object size	Length:100~800/1000mm Width: 50~600mm Height: 50~600mm
Structure of the material	Carbon steel, SS304 stainless steel (weighing platform)
Alarm light	3-color signal light (Red, yellow, green) , Optional buzzer
Display size	10-inch color touch screen
Rejector lineup	optional
Power	Single Phase AC-220V $\pm 10\%$, 50/60HZ
operating temperature	0~40°C
IP grade	IP30

* Depend on the weight, size, and material of test object. Test accuracy: 5g at 30pcs/min; 10g at 60pcs/min.

Dimensions

Unit:mm

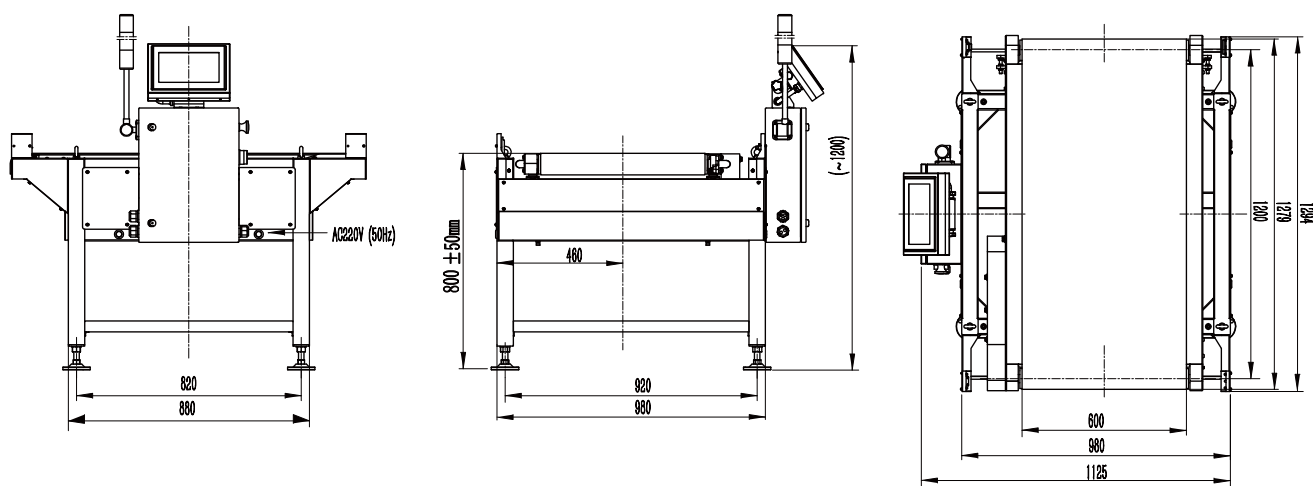

VERTICAL CHECKWEIGHER CW-60K-V

CW-60K-V checkweigher has wide weighing range but high accuracy guarantee. It is perfect for weighing the various bags and boxes running in vertical way in the production line.

- Standard module design for easy installation and maintenance;
- Easy integrating in the production line;
- Weighing range: 5~60kg, weighing accuracy is within $\pm 20g$;

Multiple applications



Standard



Economy Type

Specification


Model	CW-60K-V	CW-60K-V Economy Type
Power	AC220V \pm 10%, 50/60Hz, 1KW	AC220V \pm 10%, 50/60Hz, 1KW
Weighing Range	5~60kg	5~60kg
Highest Accuracy*	\pm 10g	\pm 20g
Highest Speed*	\leq 50pcs/min	\leq 30pcs/min
Tested Object Size	Length: 100~600mm,	Length: 100~600mm,
	Width: 50~400mm	Width: 50~400mm
	Height: 50~600mm	Height: 50~600mm
Belt Speed	40m/min	40m/min
Conveyor Size	800mm*400mm	800mm*400mm
Distance Between Rollers	800mm	800mm
Weighing Platform Height	400 (\pm 50mm)	400 (\pm 50mm)
Structure Material	Carbon Steel, SS304 (weighingPlatform)	Carbon Steel, SS304 (WeighingPlatform)
Belt Material	PVC (black)	PVC (black)
Display	10-inch touch screen	10-inch touch screen
Working Temperature	0~40°C	0~40°C
Max. Humidity	90% R.H, non-condensation	90% R.H, non-condensation
Load Limit	The instantaneous load limit is 100kg	The instantaneous load limit is100kg

*It depends on the features of tested object, such as size and weight.

Dimensions

Unit:mm

Standard

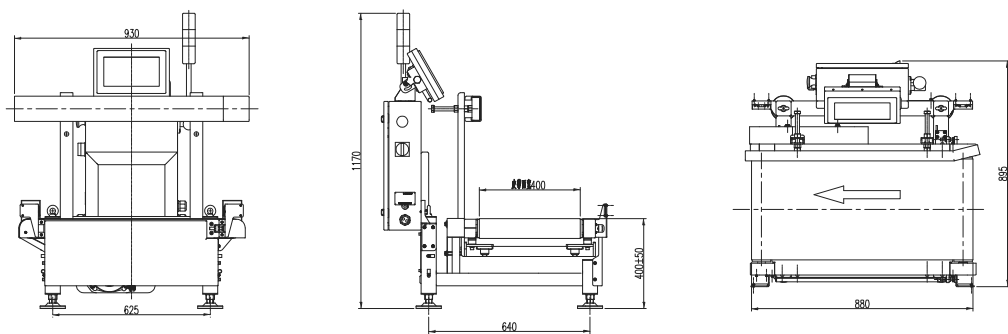

Economy Type

